

AMP[®] SECURE

OUTDOOR LED LIGHTING SOLUTIONS

2025





TABLE OF CONTENTS

WHY AMP® LIGHTING..... 3

COMPANY HISTORY..... 4-5

INTRODUCING AMP® SECURE™..... 6

THE AMP® SECURE™ OWNERSHIP ADVANTAGE..... 7

AMP® SECURE™ AT A GLANCE..... 8

COMPLIANCE..... 8

UNIFIED DESIGN AESTHETIC FOR YOUR PROPERTY..... 9

MOUNTING HEIGHT RECOMMENDATIONS..... 10 - 11

ADJUSTABLE WALL FLOOD..... 12 - 13

TWIN HEAD SECURITY – ROUND..... 14 - 15

TWIN HEAD SECURITY – RECTANGULAR..... 16 - 17

CONTEMPORARY WALL FLOOD – 35W..... 18 - 19

CONTEMPORARY WALL FLOOD – 80W..... 20 - 21

LOW PROFILE WALL PACK..... 22 - 23

DECORATIVE BARN LIGHT..... 24 - 25

MODERN AREA LIGHT..... 26 - 27

CONTRACTOR DESIGN GUIDES..... 28

RESOURCES..... 28

WHAT IS AN AMP® PRO?..... 29

AMP® LIGHTING SERVICES..... 30

AMP® LIGHTING LOW-VOLTAGE PRODUCTS..... 31

WHY AMP® LIGHTING?

AMP® Lighting is a trusted manufacturer of durable, high-performance outdoor lighting built to withstand the toughest environments. With a legacy of engineering, design, and manufacturing expertise, we create contractor-grade solutions using the finest components. As one of the fastest-growing brands in the industry, AMP® delivers premium quality, direct-to-contractor pricing, and unmatched support—empowering professionals with reliable lighting for every project.

- SECURITY**

Reliable lighting designed to enhance safety and protect homes & businesses.
- BUSINESS**

Factory-direct pricing for top-tier quality lighting at a lower cost.
- WARRANTY**

Hassle-free warranty, easy returns, and industry-leading support.
- EXPERIENCE**


15+ years of expertise, serving property owners, contractors, and partners.
- RATINGS**

Highly rated by contractors who rely on our products daily.
- INNOVATION**

We continue to push the boundaries of lighting technology, offering smart, adaptable solutions.



COMPANY HISTORY

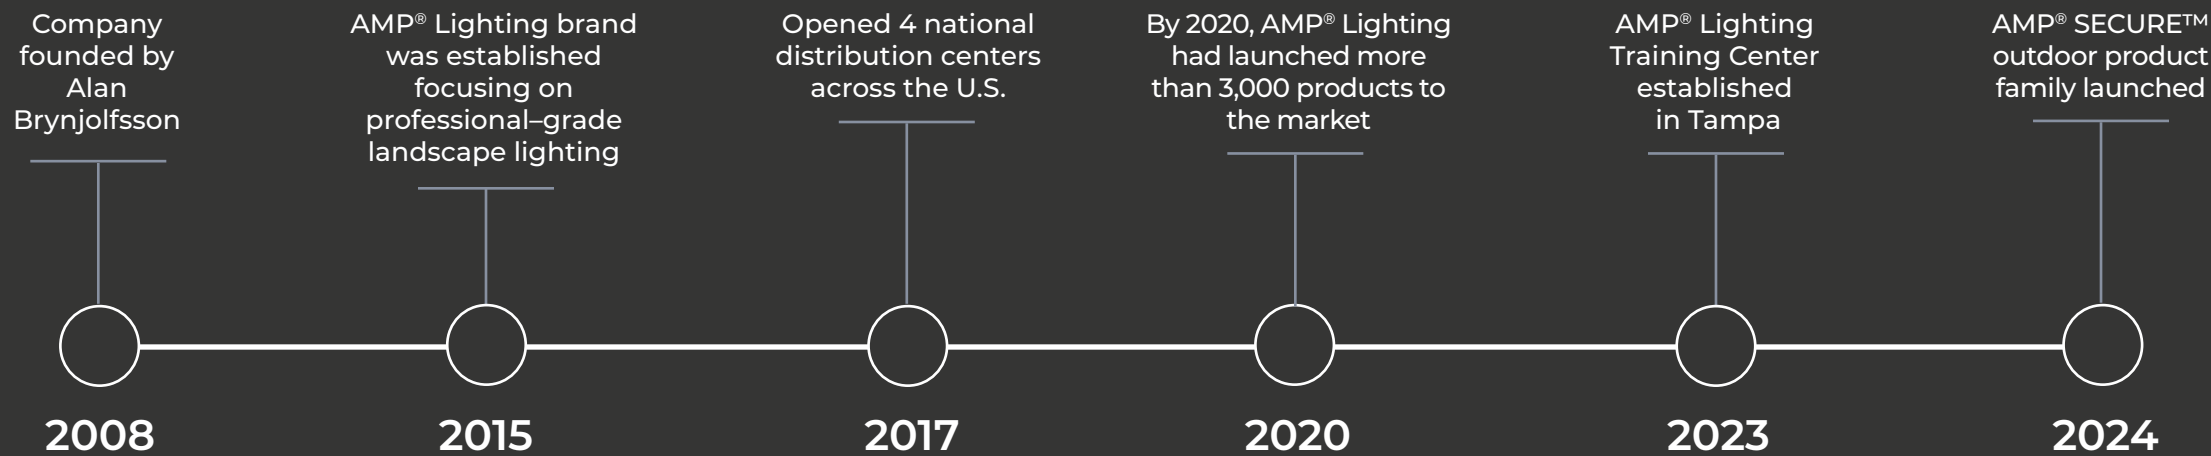

OUR MISSION STATEMENT

To deliver outstanding outdoor lighting products with such a gratifying experience that our customers become our best advocates.

INTRODUCING AMP® SECURE™

Welcome to the future of Outdoor Security Lighting! AMP® SECURE™ is the next evolution in contractor-direct outdoor security lighting—delivering durability, reliability, efficiency, and effortless installation for commercial, industrial, and residential applications.

Built for performance and versatility, AMP® SECURE™ features universal voltage (120-277V), selectable lumen output, selectable CCT (3000K, 4000K, 5000K), 0-10V dimming, and die-cast aluminum housings—all designed to maximize efficiency and adaptability across projects.

With a unified design aesthetic, AMP® SECURE™ enhances safety and security while complementing any outdoor space—from parking lots and pathways to hospitality and perimeter lighting.

Backed by AMP® Lighting’s reputation for quality and industry-leading support, AMP® SECURE™ provides reliable, contractor-focused lighting solutions—from selection to installation and beyond.



THE AMP® SECURE™ OWNERSHIP ADVANTAGE

- Easy Installation**

Quick & simple single-person installation
- Unified Design Aesthetic**

A sleek, professional look that enhances any property
- Substantial Savings**

Cut cost with factory direct pricing, no middleman markups
- Flexible Mounting**

Adapts to multiple mounting heights with adjustable lumen output

INITIAL BENEFITS

HIDDEN BENEFITS

- High Quality**

5-stage marine-grade powder coat & rigorously tested components
- Peace of Mind**

Reliable 24/7 security lighting for properties & public spaces
- Energy Savings**

LED luminaires use 75% less energy than traditional lighting
- Hassle-free Warranty**

5-year protection with expert customer support
- Reduced Maintenance**

Durable construction minimizes long-term upkeep

COMPANY FACTS

- 

25K+
HAPPY CLIENTS
- 

15+
YEARS IN BUSINESS
- 


100+
EMPLOYEES NATIONWIDE
- 

FREE SAME-DAY
GROUND SHIPPING

AMP® SECURE™ AT A GLANCE




SELECTABLE LUMEN OUTPUT
Allows for variable mounting heights



DIE-CAST CONSTRUCTION
Marine-grade polyester powder coat with a 5-stage process



DLC PREMIUM LISTED
Certified for energy efficiency and performance



BUILT-IN CONVENIENCE
0-10V dimming and dusk-to-dawn photocell come standard



IP66 RATING
Built to withstand dust, water, and harsh outdoor conditions




HASSLE-FREE WARRANTY
Backed by a 5-year industry-leading warranty



EASY INSTALLATION
Bubble level and tether for quick, single-person setup



ADJUSTABLE CCT
3000K, 4000K, 5000K for tailored illumination



SELECTABLE SWITCHES
Housed in a watertight compartment

COMPLIANCE



DesignLights Consortium® Premium Listed. DLC Premium promotes quality, performance and energy-efficient luminaires. DLC collaborates among federal, state, and regional, utility energy programs to develop rebates for commercial lighting. *Commercial products.



The Ingress Protection rating grades the resistance of an enclosure against intrusion of dust and liquids as defined by the IEC. No ingress of dust or water from heavy seas or powerful jets will enter the enclosure.



All the AMP® SECURE™ products have been evaluated, tested and listed by Underwriters Laboratories for product safety certification, including cUL.




All LM-79 Photometric testing in accordance with IES LM-79-08. LM-80/TM21 lumen maintenance projections in accordance with IES-LM-80 and TM21-10.

UNIFIED DESIGN AESTHETIC FOR YOUR PROPERTY

AMP® SECURE™ showcases a consistent, professional design across all luminaires, creating a visually unified appearance for any property. Every fixture is engineered with matching fin designs, AMP branding, and a cohesive form factor to ensure a seamless and polished look across all installations.

WHY IS THIS IMPORTANT?

A cohesive design enhances professionalism by eliminating mismatched fixtures and visual clutter, ensuring a clean, modern appearance. It also simplifies installation by reducing confusion with a consistent form factor across the product line. Additionally, a well-lit, uniform lighting design helps boost property value by creating a polished and secure environment.

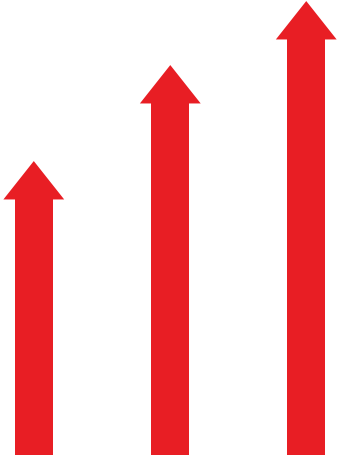

INCREASE PROPERTY VALUE



Adjustable Wall Flood Light (120-277V)
AFL-4036



35W Contemporary Flood Light (120-277V)
AFL-4034



80W Contemporary Flood Light (120-277V)
AFL-4035



Decorative Barn Light (120-277V)
ABLM-4201



Low Profile Wall Pack (120-277V)
AWP-4401



Modern Area Light with Arm Mount (120-277V)
ASA-4301



Modern Area Light with Slipfitter Mount (120-277V)
ASA-4301



Modern Area Light with Trunnion Mount (120-277V)
ASA-4301



Twin Head Rectangular Security Light (120V)
AFL-4039



Twin Head Rectangular Security Light with Motion Sensor (120V)
AFL-4040




Twin Head Round Security Light (120V)
AFL-4037



Twin Head Round Security Light with Motion Sensor (120V)
AFL-4038

MOUNTING HEIGHT RECOMMENDATIONS

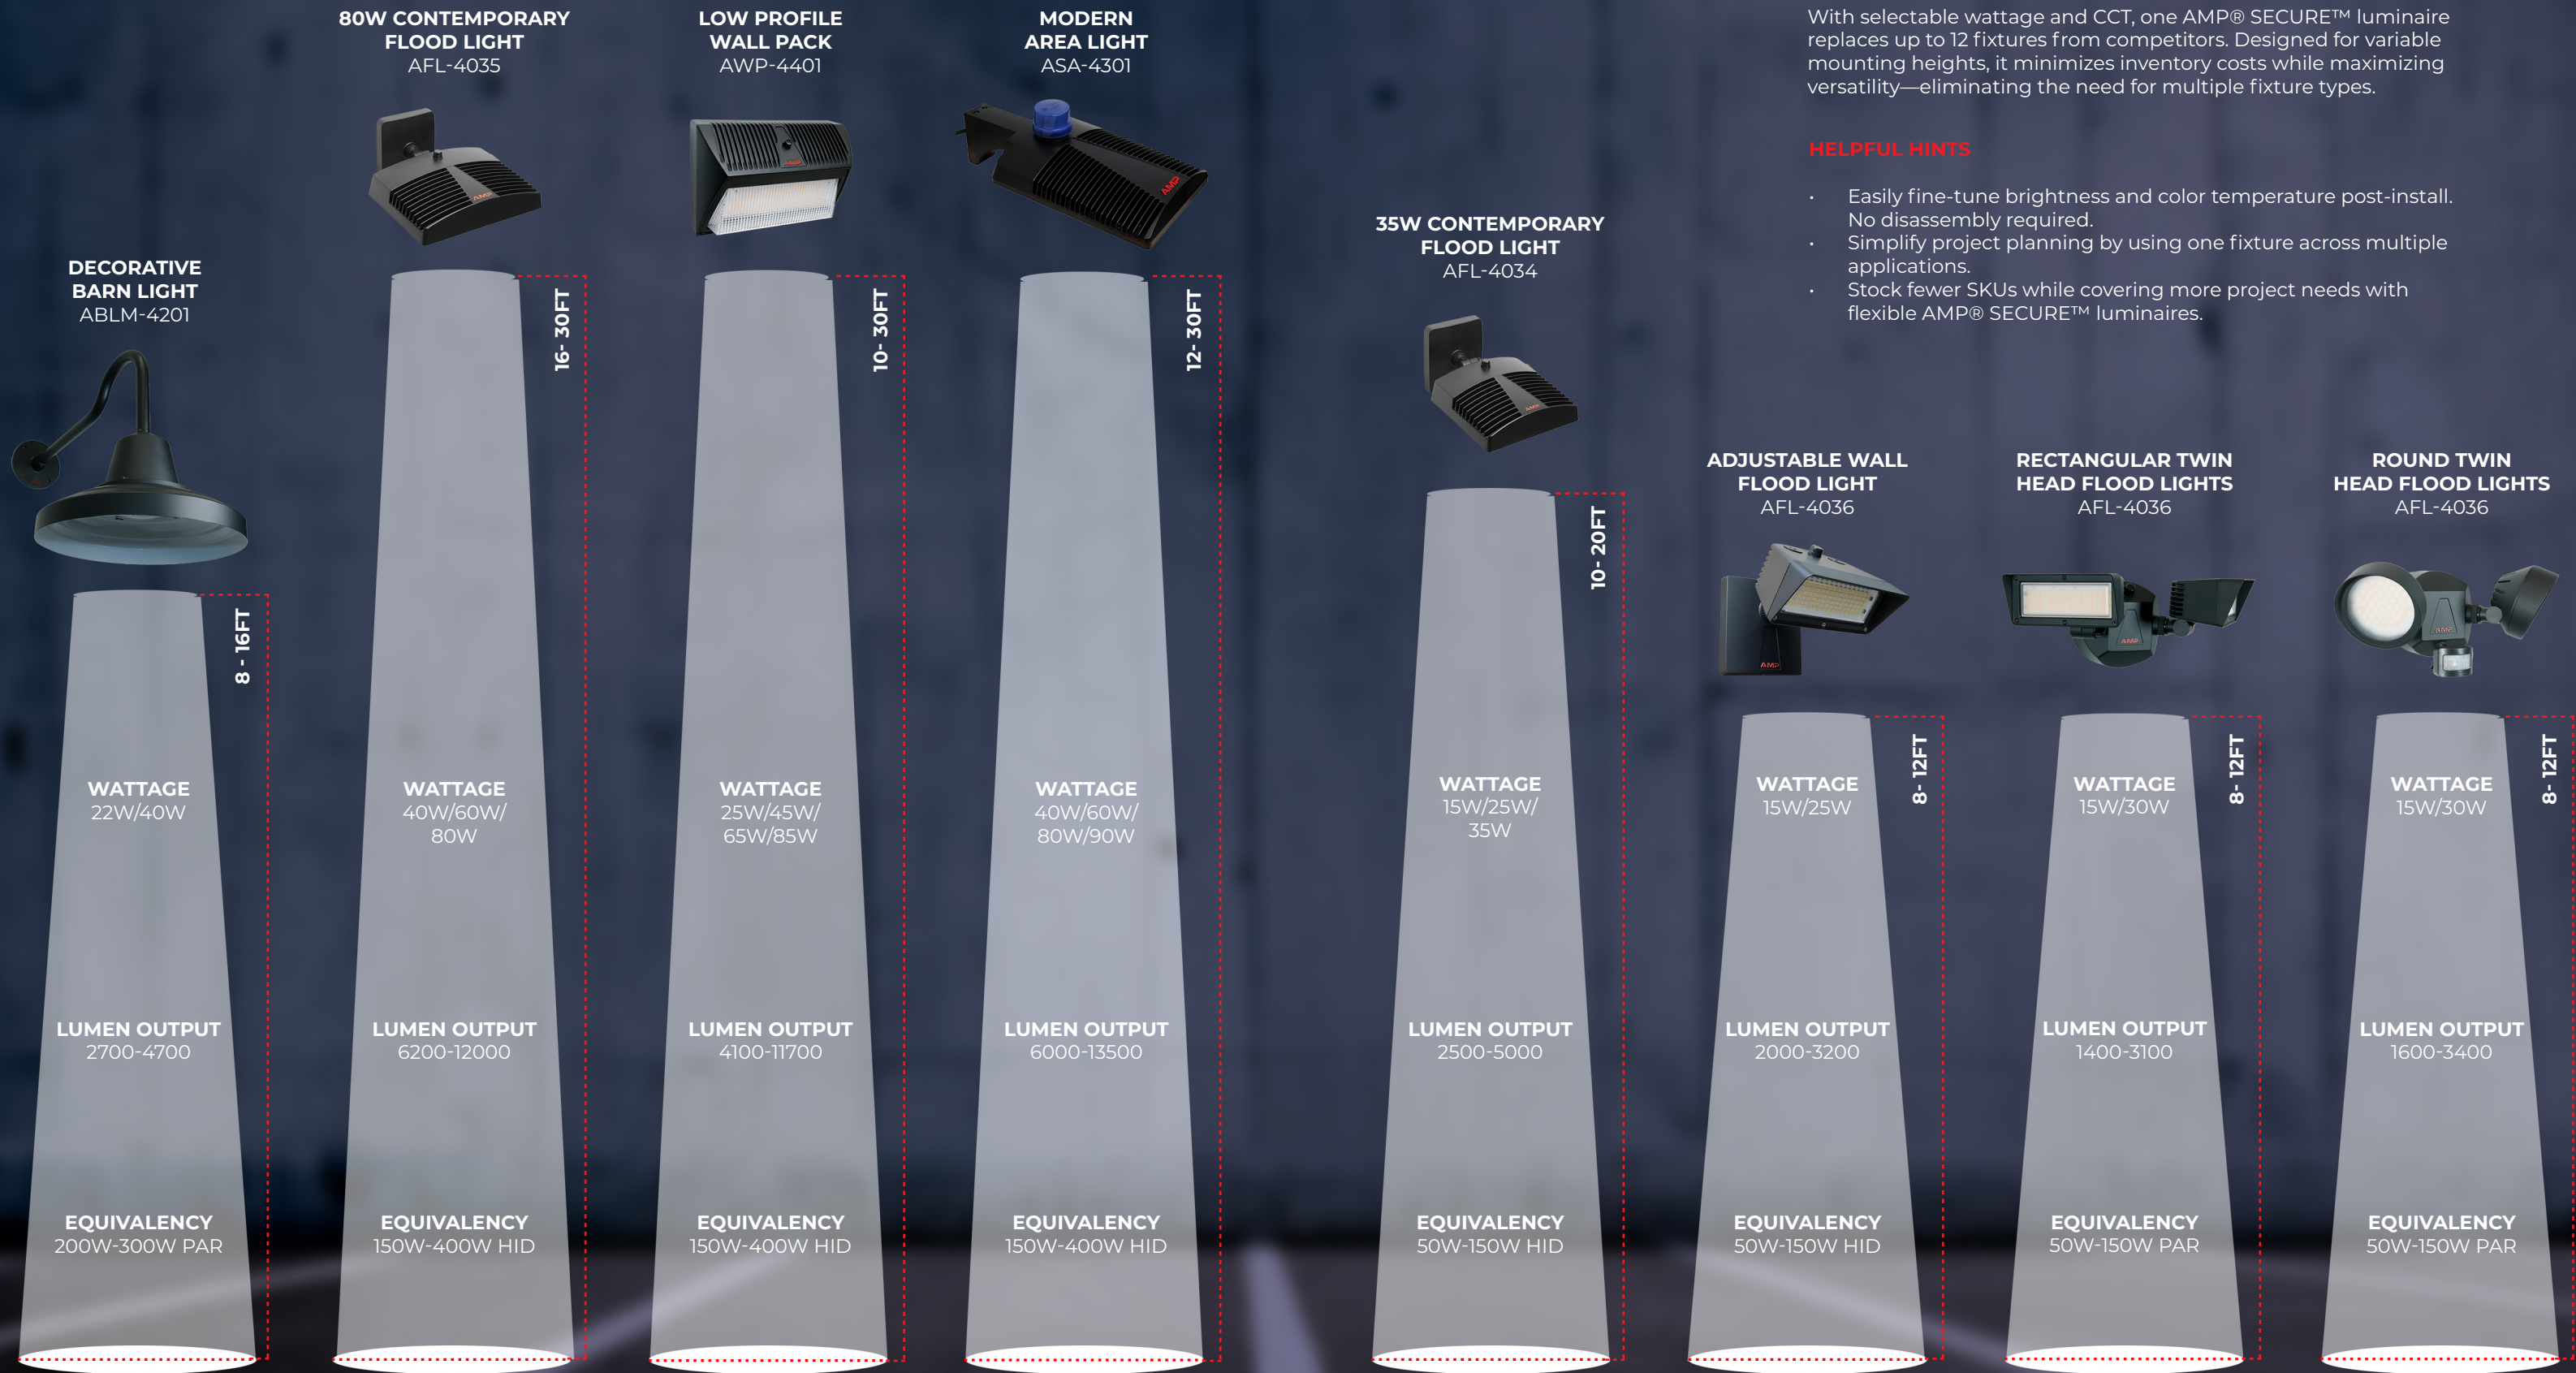


AMP® SECURE™ FLEXIBILITY

With selectable wattage and CCT, one AMP® SECURE™ luminaire replaces up to 12 fixtures from competitors. Designed for variable mounting heights, it minimizes inventory costs while maximizing versatility—eliminating the need for multiple fixture types.

- HELPFUL HINTS**
- Easily fine-tune brightness and color temperature post-install. No disassembly required.
 - Simplify project planning by using one fixture across multiple applications.
 - Stock fewer SKUs while covering more project needs with flexible AMP® SECURE™ luminaires.


ADJUSTABLE WALL FLOOD
AFL-4036

FINISHES ● Bronze ● Black ● White

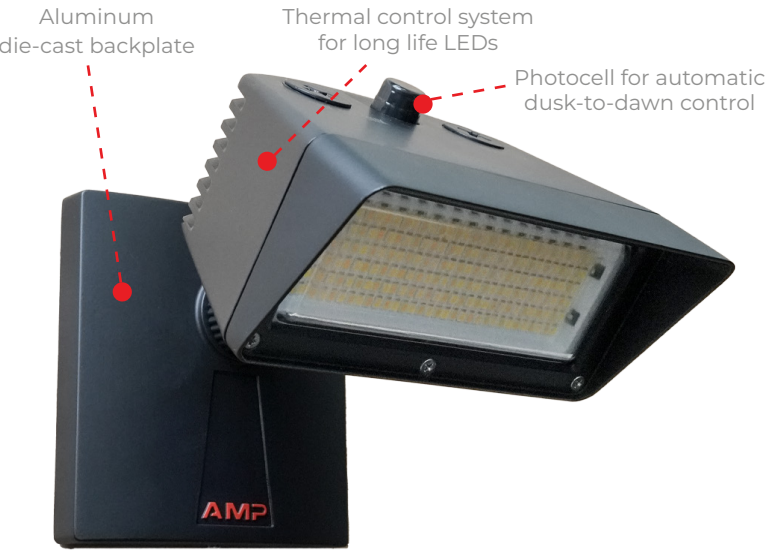

The AMP® SECURE™ 120V-277V Adjustable Wall Flood light is a modern approach to safety and security. The petite security luminaire provides security in any location. With a decorative easy-install mounting plate, the adjustable flood light illuminates both residential and commercial spaces.

With conveniently located lumen and CCT adjustable switches on the exterior of the fixture, have confidence to install anywhere, and adjust after installation. Between 5"-6 ½" off the wall (depending on angle of adjustment), 4 ½" tall and 5 ½" wide.

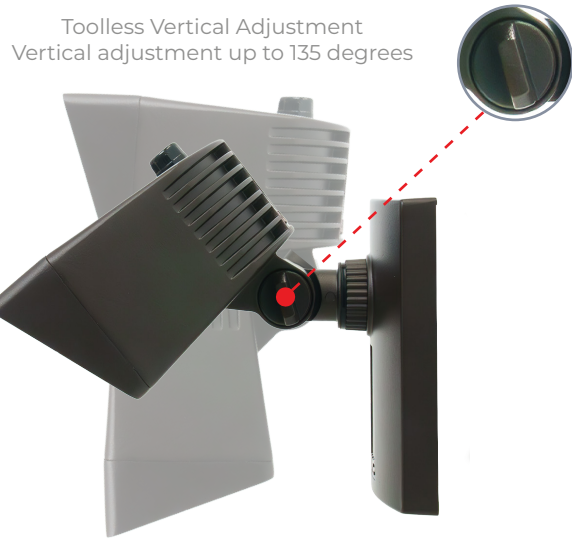

Lumen and CCT selectable switch locations



Gasketed universal mounting bracket for easy installation



LUMEN SELECTION


Nominal Wattage	CCT	Lumens	Legacy Equivalent
15W	3000	1911	50W HPS/MH
	4000	1958	
	5000	1995	
25W	3000	3081	100-150W HPS/MH
	4000	3202	
	5000	3226	

Installation Recommendations

- Residential security
- Home and garage entryways
- Commercial installations
- Doorways
- Perimeter lighting
- Fences and gates
- For 8' to 12' mounting heights



Easy single person installation with tether

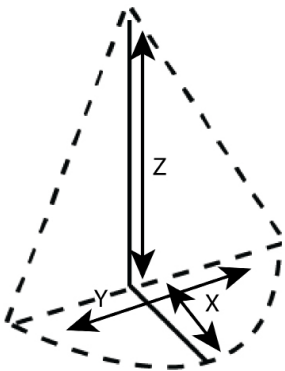

AREA COVERAGE

0.50 fc level at different mounting heights

Mounting Height (Z)			8'		10'		12'	
Product	Wattage	Lumens	X	Y	X	Y	X	Y
AFL-4036-25S	15W	1911	12'	28'	14'	32'	16'	34'
	25W	3081	16'	32'	18'	34'	20'	36'

Luminaire position is facing downwards. All data is based on 3000 CCT.

X= Forward Throw Y= Wall Spread Z= Mounting Height

EXAMPLE: AFL-4036 -25S-UNV-S-A-BZ

Product	Wattage/ Lm	Voltage	CCT	Material	Finish
AFL-4036	25S= 15W/25W Selectable 2000, 3200 lms	UNV= 120-277V	S= 3/4/5K Selectable	A= Aluminum	BZ = Bronze BK = Black WH = White


TWIN HEAD SECURITY – ROUND
AFL-4037 | AFL-4038

FINISHES  Black  White



The AMP® SECURE™ 120V Twin Head Round security light is an attracted low-glare solution for low-glare solution for residential and commercial security lighting, designed to minimize light spill into neighboring properties. Constructed from durable die-cast aluminum, this versatile fixture features selectable lumen output and CCT, an integrated photocell for dusk-to-dawn operation, and an optional PIR motion sensor.

Designed for efficiency and ease of installation, this fixture offers tool-free vertical adjustment and a built-in bubble level for precise positioning. Ideal for illuminating residential perimeter areas, garages, and walkways, it provides flexible security lighting with a compact, adjustable form factor. Nominal dimensions are 15" wide, 5" tall, and approximately 8" off the wall, depending on the angle of adjustment.

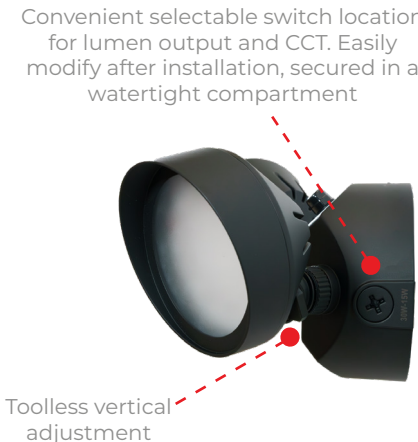


LUMEN SELECTION

Nominal Wattage	CCT	Lumens	Legacy Equivalent
15W	3000	1523	75-90W PAR
	4000	1582	
	5000	1568	
25W	3000	3208	150-200W PAR
	4000	3452	
	5000	3356	




Installation Recommendations

- Ideal for residential and light commercial security
- Home and garage entryways
- Pool areas
- Walkways
- Residential perimeter
- Fences and gates
- For 8' to 12' mounting heights

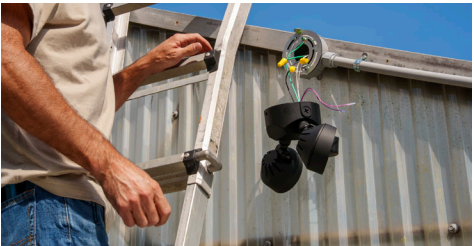


Easy single person installation with tether



AREA COVERAGE

Motion Sensor Coverage area 120 degrees at a 30-foot distance.

LIGHT CONTROL & TIME SETTING SWITCH (BACK OF MOTION SENSOR)



Adjust the LUX level to establish the minimum amount of ambient light required to turn on the light each evening.

TIME adjustment controls the amount of time the security light will stay on after motion is detected.

EXAMPLE: AFL-4038 -30S-MS-LI-S-A-WH

Product	Wattage/ Lm	Motion Sensor	Voltage	CCT	Material	Finish
AFL-4037	30S=15W/30W Selectable 1600, 3400 lms	None	LI= 120V	S= 3/4/5K Selectable	A= Aluminum	BK = Black WH = White
AFL-4038	30S=15W/30W Selectable 1600, 3400 lms	MS=Motion Sensor	LI= 120V	S= 3/4/5K Selectable	A= Aluminum	BK = Black WH = White

TWIN HEAD SECURITY – RECTANGULAR
AFL-4039 | AFL-4040

FINISHES  Black  White



The AMP® SECURE™ 120V Twin Head Rectangular security light is an attracted low-glare solution for low-glare solution for residential and commercial security lighting, designed to minimize light spill into neighboring properties. Constructed from durable die-cast aluminum, this versatile fixture features selectable lumen output and CCT, an integrated photocell for dusk-to-dawn operation, and an optional PIR motion sensor.

Designed for efficiency and ease of installation, this fixture offers tool-free vertical adjustment and a built-in bubble level for precise positioning. Ideal for illuminating residential perimeter areas, garages, and walkways, it provides flexible security lighting with a compact, adjustable form factor. Nominal dimensions are 15" wide, 5" tall, and approximately 8" off the wall, depending on the angle of adjustment.



Convenient selectable switch location for lumen output and CCT. Easily modify after installation, secured in a watertight compartment



LUMEN SELECTION

Nominal Wattage	CCT	Lumens	Legacy Equivalent
15W	3000	1407	75-90W PAR
	4000	1425	
	5000	1445	
25W	3000	3030	150-200W PAR
	4000	3127	
	5000	3112	




Installation Recommendations

- Ideal for residential and light commercial security
- Home and garage entryways
- Pool areas
- Walkways
- Residential perimeter
- Fences and gates
- For 8' to 12' mounting heights




Easy single person installation with tether



AREA COVERAGE

Motion Sensor Coverage area 120 degrees at a 30-foot distance.

LIGHT CONTROL & TIME SETTING SWITCH (BACK OF MOTION SENSOR)



Adjust the LUX level to establish the minimum amount of ambient light required to turn on the light each evening.

TIME adjustment controls the amount of time the security light will stay on after motion is detected.

EXAMPLE: AFL-4040 -30S--MS-LI-S-A-WH

Product	Wattage/ Lm	Motion Sensor	Voltage	CCT	Material	Finish
AFL-4039	30S=15W/30W Selectable 1400, 3100 lms	None	LI= 120V	S= 3/4/5K Selectable	A= Aluminum	BK = Black WH = White
AFL-4040	30S=15W/30W Selectable 1400, 3100 lms	MS=Motion Sensor	LI= 120V	S= 3/4/5K Selectable	A= Aluminum	BK = Black WH = White

CONTEMPORARY WALL FLOOD – 35W
AFL-4034

FINISHES  Bronze  Black



The AMP® SECURE™ 120V-277V AFL Contemporary Wall Flood light is supplied with a decorative easy-install mounting plate. The series is full-featured with selectable lumen output and CCT, allowing for nine different configurations in one luminaire.


This versatile luminaire can be wall or ground mounted and comes with an industry standard ½" NPS pipe thread at the base for other installation options. Nominal dimensions are 10" off the wall, 2 ¼" tall and 7 ¼" wide.



Toolless Vertical Adjustment
Vertical adjustment up to 180 degrees



Gasketed universal mounting bracket for easy installation

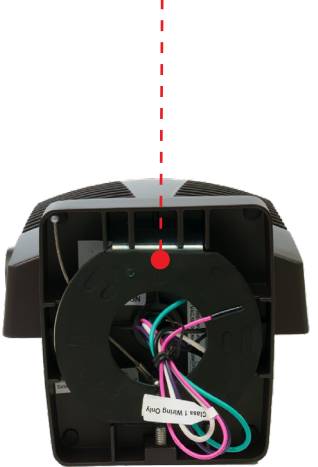

Convenient selectable switch location for lumen output and CCT. Easily modify after installation, secured in a watertight compartment



Tempered glass lens combines with powerful and efficient LED panel


LUMEN SELECTION

Nominal Wattage	CCT	Lumens	Legacy Equivalent
15W	3000	2269	50W HPS/MH
	4000	2345	
	5000	2403	
25W	3000	3651	100W HPS/MH
	4000	3855	
	5000	3870	
35W	3000	4821	150W HPS/MH
	4000	5164	
	5000	5128	


Installation Recommendations

- Exterior building
- Residential perimeter
- Building entryways
- Signage markings
- Activity areas
- For 10' to 20' mounting heights

For ground mounting, use 1/2" NPT thread

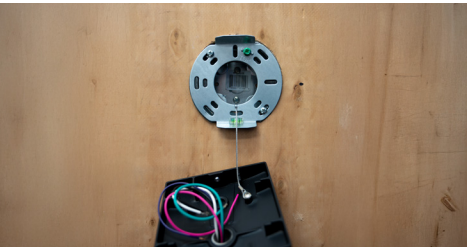

Easy single person installation with tether

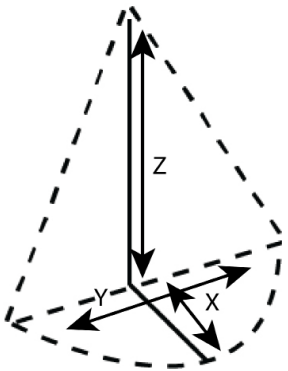

AREA COVERAGE

0.50 fc level at different mounting heights

Mounting Height (Z)			10'		15'		20'	
Product	Wattage	Lumens	X	Y	X	Y	X	Y
AFL-4034-35S	15W	2269	14'	36'	18'	44'	20'	52'
	25W	3651	16'	40'	18'	48'	22'	54'
	25W	4821	18'	42'	20'	52'	22'	56'

Luminaire position is facing downwards. All data is based on 3000 CCT.

X= Forward Throw Y= Wall Spread Z= Mounting Height

EXAMPLE: AFL-4034-35S-UNV-S-A-BK

Product	Wattage/ Lm	Voltage	CCT	Material	Finish
AFL-4034	35S= 15W/25W/35W Selectable 2400,3900,5200 lms	UNV= 120-277V	S= 3/4/5K Selectable	A= Aluminum	BZ= Bronze BK= Black

CONTEMPORARY WALL FLOOD – 80W
AFL-4035

FINISHES  Bronze  Black



The AMP® SECURE™ 120V-277V AFL Contemporary Wall Flood light is supplied with a decorative easy-install mounting plate. The series is full-featured with selectable lumen output and CCT, allowing for nine different configurations in one luminaire.


This versatile luminaire can be wall or ground mounted and comes with an industry standard ½” NPS pipe thread at the base for other installation options. Nominal dimensions are 10” off the wall, 2 ¼” tall and 9 ½ ” wide.



Toolless Vertical Adjustment
Vertical adjustment up to 180 degrees



Gasketed universal mounting
bracket for easy installation

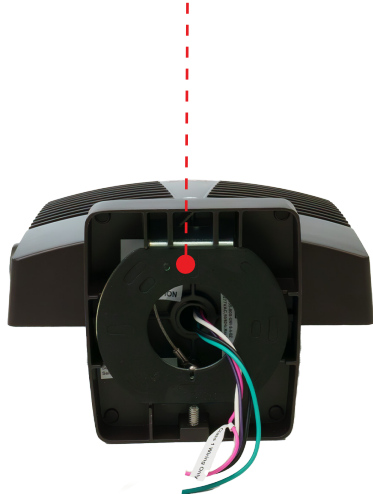

Convenient selectable
switch location for lumen
output and CCT. Easily
modify after installation,
secured in a watertight
compartment



Tempered glass lens combines with
powerful and efficient LED panel

LUMEN SELECTION

Nominal Wattage	CCT	Lumens	Legacy Equivalent
40W	3000	6282	150-175W HPS/MH
	4000	6563	
	5000	6686	
60W	3000	8757	250W HPS/MH
	4000	9247	
	5000	9386	
80W	3000	11292	400W HPS/MH
	4000	12012	
	5000	12002	


Installation Recommendations

- Exterior building
- Residential perimeter
- Building entryways
- Signage markings
- Activity areas
- For 16’ to 30’ mounting heights

For ground mounting,
use 1/2” NPT thread



Easy single person installation with tether

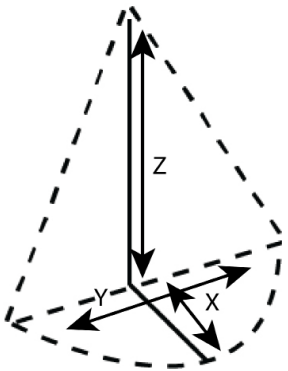

AREA COVERAGE

0.50 fc level at different mounting heights

Mounting Height (Z)			12’		16’		20’	
Product	Wattage	Lumens	X	Y	X	Y	X	Y
AFL-4034-35S	40W	6282	18’	56’	24’	64’	35’	70’
	60W	8757	20’	62’	26’	70’	38’	76’
	80W	11292	21’	66’	27’	74’	42’	88’

Luminaire position is facing downwards. All data is based on 3000 CCT.

X= Forward Throw Y= Wall Spread Z= Mounting Height

EXAMPLE: AFL-4034-85S-UNV-S-A-BZ

Product	Wattage/ Lm	Voltage	CCT	Material	Finish
AFL-4035	85S= 40W/60W/80W Selectable 7000, 9800, 12500 lms	UNV= 120-277V	S= 3/4/5K Selectable	A= Aluminum	BZ= Bronze BK= Black



LOW PROFILE WALL PACK
AWP-4401

FINISHES  Bronze  Black



The AMP® SECURE™ 120V-277V Low Profile Wall Pack is an elevated version of the traditional wall pack design with a low-profile housing for shallow depth off the mounting surface. AMP SECURE™'s reimagined wall pack design includes selectable wattage and CCT for in field customization to ensure proper illumination for the space and various mounting heights.

Industry-leading standard features include universal voltage 120-277V, 4kV surge protection and 0-10V dimming. Operating temperature range of -40° C to + 40° C. While the design is a classic, the AWP is the next generation. Nominal dimensions are 5 ½" off the wall, 9" tall and 13" wide.

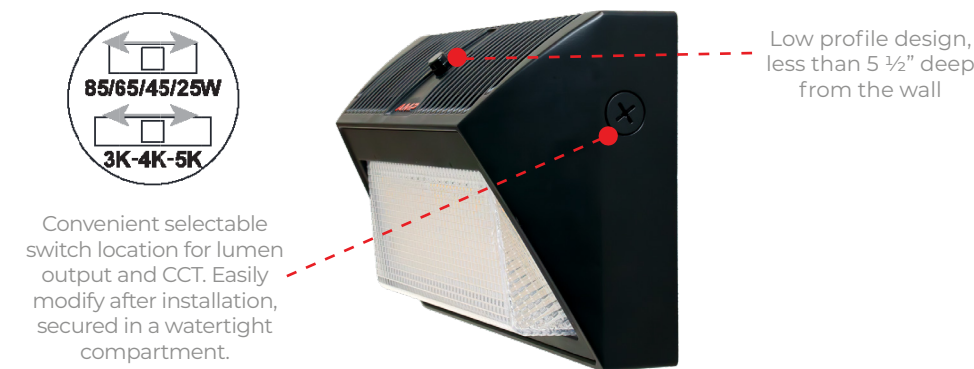

Gasketed universal mounting bracket for easy installation



LUMEN SELECTION			
Nominal Wattage	CCT	Lumens	Legacy Equivalent
25W	3000	4061	50-100W HPS/MH
	4000	4073	
	5000	4231	
45W	3000	6229	150-175W HPS/MH
	4000	6316	
	5000	6513	
65W	3000	8725	250W HPS/MH
	4000	8953	
	5000	9101	
85W	3000	11182	400W HPS/MH
	4000	11595	
	5000	11674	



Installation Recommendations

- Building perimeter
- Building entryways
- Loading and dock areas
- Schools
- Industrial buildings
- Walkways
- Parking garages
- For 10' to 30' mounting heights

Easy single person installation with tether equipped backplate and universal j-box mounting plate included.

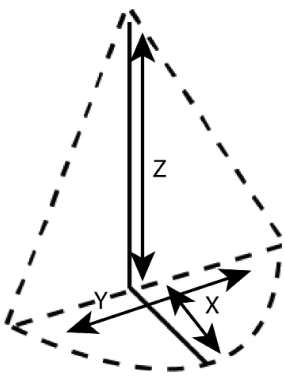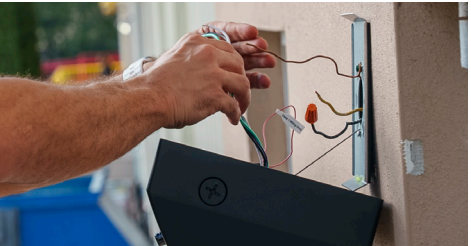

AREA COVERAGE

0.50 fc level at different mounting heights

Mounting Height (Z)			10'		20'		30'	
Product	Wattage	Lumens	X	Y	X	Y	X	Y
AWP-4401-85S	25W	4061	30'	32'	35'	40'	32'	34'
	45W	6229	36'	44'	40'	50'	46'	52'
	65W	8725	40'	48'	48'	56'	52'	60'
	85W	11182	44'	52'	54'	66'	56'	70'

Luminaire position is facing downwards. All data is based on 3000 CCT.

X= Forward Throw Y= Wall Spread Z= Mounting Height

EXAMPLE: AFL-4401-85S-UNV-S-A-BK

Product	Wattage/ Lm	Voltage	CCT	Material	Finish
AFL-4035	85S= 25W/45W/65W/85W Selectable 4200, 6500, 9100, 11700 lms	UNV= 120-277V	S= 3/4/5K Selectable	A= Aluminum	BZ= Bronze BK= Black

DECORATIVE BARN LIGHT
ABLM-4201

FINISH  Black



The AMP® SECURE™ 120V-277V vintage style Decorative Barn Light is a technical innovation of a classic dusk-to-dawn luminaire. The ABLM offers a highly configurable product with selectable lumens, CCT, three mounting arm options and a traditional shade. Up to 18 different combinations. With a housing constructed of die-cast aluminum and a high-end marine grade polyester powder coat finish, this reliable series is built to last.


Ideal for residential and commercial applications. Three different gooseneck arm options are ordered separately. Easy field installation and assembly. Comes with an easy pull string to thread the wires through the gooseneck arm.



G1 STANDARD GOOSENECK



G2 LONG GOOSENECK

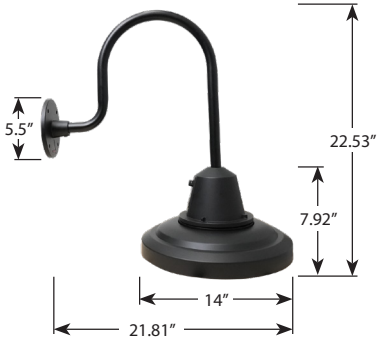

G3 SHORT GOOSENECK



LUMEN SELECTION

Nominal Wattage	CCT	Lumens	Legacy Equivalent
22W	3000	2600	150-200W PAR
	4000	2670	
	5000	2708	
40W	3000	4410	300W PAR
	4000	4684	
	5000	4653	


Photocell for automatic dusk-to-dawn control

Convenient selectable switch location for lumen output and CCT. Easily modify after installation, secured in a watertight compartment



Installation Recommendations

- Over garage doors
- Barn illumination
- Store fronts
- Shopping areas
- Door entryways
- For 8' to 16' mounting heights

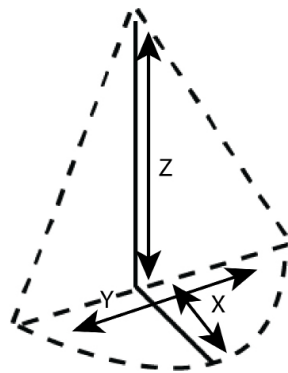

AREA COVERAGE

0.50 fc level at different mounting heights

Mounting Height (Z)			8'		12'		16'	
Product	Wattage	Lumens	X	Y	X	Y	X	Y
AFL-4201-40S	22W	2600	16'	32'	20'	40'	22'	44'
	40W	4410	18'	36'	22'	44'	26'	52'

Luminaire position is facing downwards. All data is based on 3000 CCT.


X= Forward Throw Y= Wall Spread Z= Mounting Height

EXAMPLE: AFL-4201-40S-UNV-S-A-BK

Product	Wattage/ Lm	Voltage	CCT	Material	Finish
AFL-4201	40S= 22W/40W Selectable 2700, 4700 lms	UNV= 120-277V	S= 3/4/5K Selectable	A= Aluminum	BK= Black

MODERN AREA LIGHT
ASA-4031

FINISHES  Bronze  Black

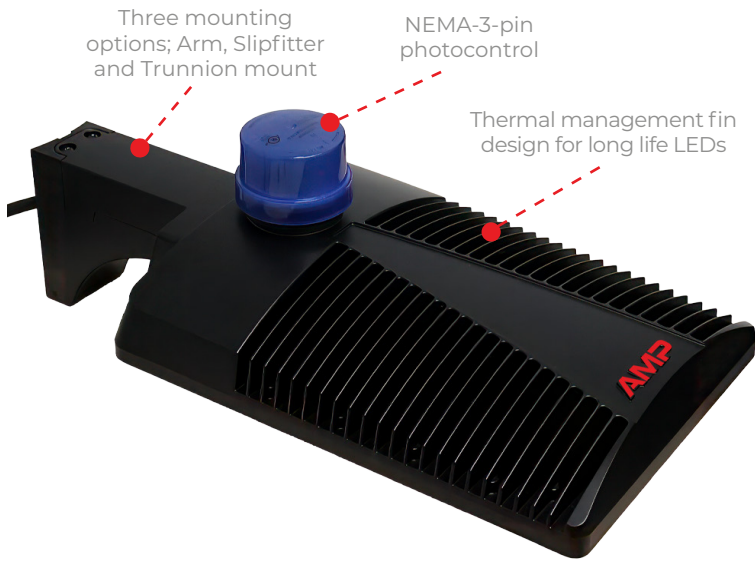

The AMP® SECURE™ 120V-277V Modern Area Light is a compact site lighting solution delivering over 13,000 lumens and includes three mounting styles. This rugged, aluminum, die-cast luminaire will exceed expectations. With an industry leading 4 lumen settings this versatile luminaire will easily install into a wide variety of locations.

Keep one luminaire type on hand to meet all your installation needs. Complete with a high-end marine grade polyester powder coat finish, this reliable series is built to last. With an industry-leading four lumen settings, this versatile luminaire offers unmatched adaptability for a wide range of installations.



THREE MOUNTING OPTIONS

ARM MOUNT



Mounts directly to the side a square or 4" to 6" diameter round pole. Also mounts to flat surfaces. Wire access through clam-shell arm design.

TRUNNION MOUNT



This flexible mounting bracket ensures mounting to most surfaces. Easy adjustability provides illumination exactly where it is needed.

SLIPFITTER MOUNT



Mounting directly to a pole or other tenon mount bracket. Fits 2-3/8" OD tenon. Provided with angular degree markings for precise aiming.

LUMEN SELECTION

Nominal Wattage	CCT	Lumens	Legacy Equivalent
40W	3000	6231	50-175W HPS/MH
	4000	6427	
	5000	6520	
60W	3000	9050	250W HPS/MH
	4000	9496	
	5000	9539	
80W	3000	11522	400W HPS/MH
	4000	12184	
	5000	12068	
90W	3000	12675	400W HPS/MH
	4000	13502	
	5000	13260	

Includes angular degree markings for consistent installation for multiple luminaires




Convenient selectable switch location for lumen output and CCT. Easily modify after installation, secured in a watertight compartment



Installation Recommendations

- Parking lot areas
- Sports and activity areas
- Building Perimeters
- Shopping areas
- Automobile dealerships
- For 12' to 30' mounting heights

TYPE IV



Precision designed polycarbonate lens for Type IV distribution

Type IV optical design provides a semicircular even light pattern with a slight forward throw.



AREA COVERAGE

0.50 fc level at different mounting heights

Mounting Height (Z)			12'		16'		20'	
Product	Wattage	Lumens	X	Y	X	Y	X	Y
ASA-4301-90S	40W	6231	26'	60'	30'	68'	36'	70'
	60W	9050	28'	68'	34'	76'	38'	80'
	80W	11522	32'	72'	38'	80'	40'	90'
	90W	12675	34'	74'	40'	84'	42'	92'

Luminaire position is facing downwards. All data is based on 3000 CCT.

X= Forward Throw Y= Wall Spread Z= Mounting Height

EXAMPLE: ASA-4301-90S-UNV-S-SF-T4-A-BZ

Product	Wattage/ Lm	Voltage	CCT	Mounting	Distribution	Material	Finish
ASA-4301	90S= 40W/60W/80W/90W Selectable 6000, 9000, 12000, 13500 lms	UNV= 120-277V	S= 3/4/5K Selectable	SF= Slipfitter AM= Arm Mount TR= Trunnion Mount	T4= Type 4 Distribution	A= Aluminum	BZ= Bronze BK= Black

CONTRACTOR DESIGN GUIDE

HELPFUL HINTS

- Pay close attention to dark corners and building perimeters to deter intruders
- Use warmer CCT levels for entryways and cooler CCT levels for functional areas
- Ensure even lighting to avoid shadows that might cause accidents
- Always comply with local codes
- Use IP66 rated luminaires for maximum water and dust resistance
- AMP SECURE™ luminaires can be modified for lumen output and CCT, so its easy to adjust even after installation.
- Install along fences or property lines
- A general rule in parking lots is to space the poles about 2.5 to 4 times the height of the pole for uniform coverage.

OUTDOOR LIGHTING FOOTCANDLE RECOMMENDATIONS

Exterior Space	Horizontal Footcandle Target (Eh)
Parking (open) Lighting Zone 3 (Urban)	0.75 - 3
Parking (open) Lighting Zone 2 (Suburban)	0.5 - 2
Gas Station Canopy	10 - 15
Safety (Building Exterior)	0.5 - 2
Automotive Sales Lot Lighting Zone 3 (Urban)	10 - 40
Automotive Sales Lot Lighting Zone 2 (Suburban)	7.5 - 30
Walkway and Path	2 - 5
Loading Docks	5 - 10
High-traffic intersections	5 - 10
Building entrances	10 - 20
High-traffic intersections	20 - 50

*This guide is based on information from the IES “The Lighting Handbook”.

All AMP SECURE™ installations should follow any local codes as required.



RESOURCES

DSIRE

DSIRE is a database of available energy program incentives by state. Search your zip code for rebates available in your area. DLC Premium listed products are often available with a rebate. <https://www.dsireusa.org/>

YOUTUBE

AMP Lighting Product videos are available with additional details of all AMP Secure products. <https://www.youtube.com/watch?v=IFejWMDStHQ&t=12s>

WHAT IS AN AMP® PRO?

AMP® Pro is an exclusive membership program designed for professional contractors who demand high-quality outdoor lighting solutions at the best value. As an AMP® Pro, you'll gain additional pricing, priority support, and exclusive benefits tailored to help you grow your business. Whether you're tackling landscape lighting installations or security lighting projects, being an AMP® Pro ensures you get the products, service, and support you need—faster and more efficiently.

REASONS TO BECOME AN AMP® PRO

No Cost, All Benefits – Sign up for free and unlock exclusive benefits, resources and expert support.

Factory-Direct Savings – Get premium, contractor-grade lighting at lower costs, plus free shipping on most orders—no middleman markup.

Uncompromising Product Quality – Built with durable materials and rigorously tested for reliability in any environment.

Fast, Reliable Fulfillment – Priority access to fully stocked warehouses and nationwide distribution for quick deliveries.

Pricing & Perks – Enjoy instant quotes, dedicated account support, and special promotions only available to AMP® Pros.

Hassle-Free Warranty – 5-year coverage with same-day replacements on manufacturing defects (M-F, before 5p ET).


Contractor-First Support – 5-star U.S.-based customer service designed to keep your projects on track.

There is no cost to become an authorized AMP® Pro.



PROEDGE
REWARDS
POWERED BY TRUST. BUILT ON LOYALTY.

HOW PROEDGE
REWARDS WORKS

 YOU
EARN IT

Every qualifying purchase counts towards your status. The more you spend, the higher your tier and corresponding store credit.

 WE
TRACK IT


We'll keep track of your purchases during the fiscal quarter. Your AMP® Specialist will periodically update you on your progress.

 YOU
SPEND IT

Receive an AMP® store credit at the end of the fiscal quarter to spend on anything your business needs. – bulbs, fixtures, transformers, accessories

AMP® LIGHTING SERVICES

FAST GROUND SHIPPING - 4 SHIPPING LOCATIONS | 3 DAYS OR LESS

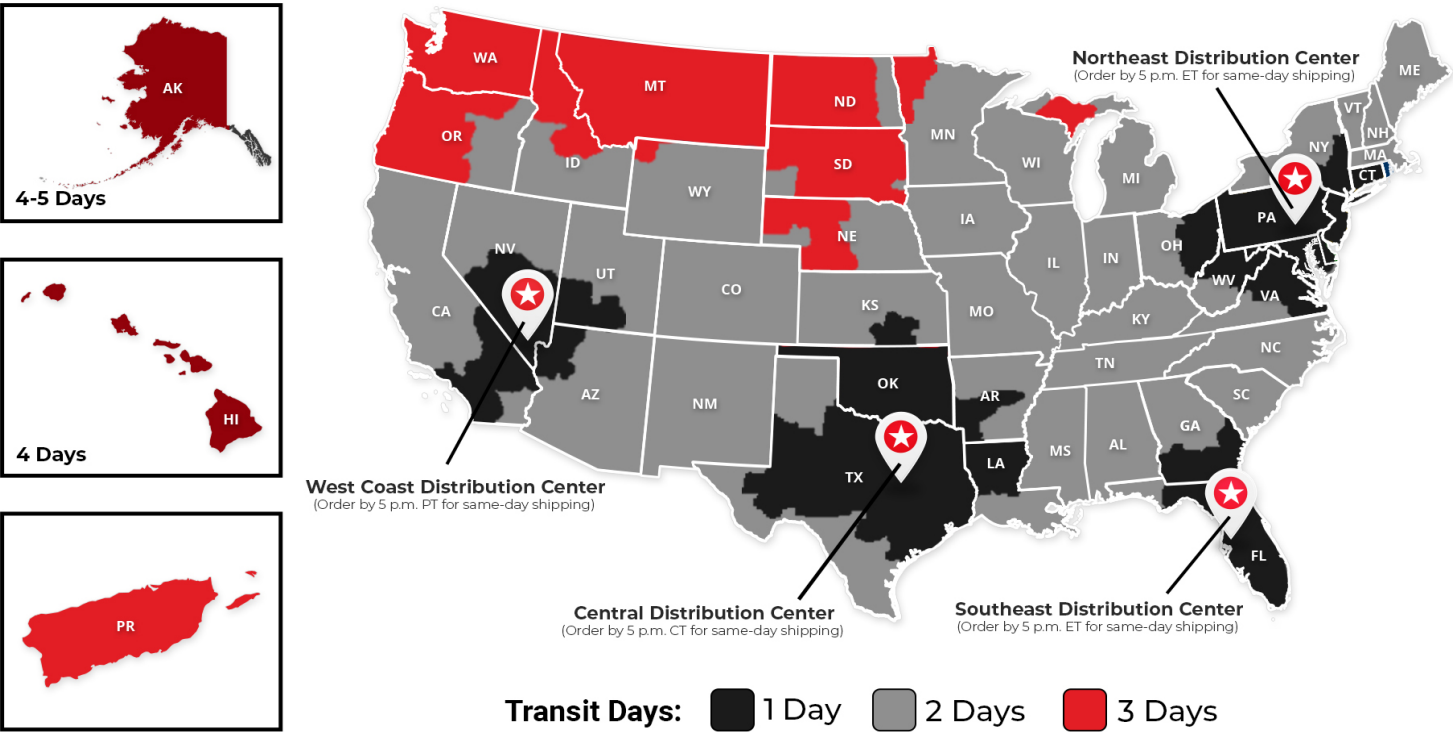

Orders before 5 p.m. ship SAME DAY. Business Days in transit are based off **UPS Ground Shipping** selected at checkout.



24-48 hours shipping now standard to more locations



All orders received before 5 pm (M-F) ship same day.



4 AMP® Distribution Centers for faster delivery time



AMP® LIGHTING LOW-VOLTAGE PRODUCTS

AMP® Lighting is your complete outdoor lighting partner, offering professional-grade low-voltage landscape lighting to complement AMP SECURE™. Our durable, cast-brass fixtures provide long-lasting beauty and performance, backed by a lifetime warranty and factory-direct pricing. From path lights and spotlights to hardscape and underwater lighting, AMP® delivers the versatility and reliability contractors need to create seamless, high-quality outdoor lighting designs.



LIFETIME WARRANTY



CAST BRASS













TOP RATED



LIVE CUSTOMER SUPPORT



LOWEST PRICES

				
Spotlights	Path Lights	Hardscape Lights	Deck & Step Lights	Color LED Lights
				
Well Lights	Flood Lights	Underwater Lights	LED Lamps	Transformers

GET SECURED

AMP® Lighting

15486 N Nebraska Ave,
Lutz, FL 33549

813.978.3900
sales@amplighting.com
amplighting.com