INSTALLATION & MAINTENANCE GUIDE



AMP® Low Voltage Landscape Lighting AMP® PillarPro LED Post-Top Light APL-3019-4-B-BZ

Help Hotline:

1-813-978-3900 • Mon-Fri 9am-6pm (EST)

INSTALLATION & MAINTENANCE GUIDE



AMP® PillarPro LED Post-Top Light APL-3019-4-B-BZ

A

Important Safety Instructions: Read Before Installation

This luminaire is intended for installation in accordance with local codes and the National Electric Code (NEC). Failure to adhere to these codes and instructions may result in serious injury, property damage and void the warranty.

These instructions do not intend to cover all variations in installation, operation maintenance or mounting situations.

- Make sure the power is turned OFF before installing or servicing this luminaire.
- 2. WARNING: risk of electrical shock. Install all luminaires 10 feet (3.05M) or more from pool, spa or fountain.
- 3. This luminaire is intended to be used only with a power supply (transformer) rated maximum of 300 watts (25 AMPS) at 15 volts.
- 4. Wiring connections must be made with UL listed wire connectors that are suitable for outdoor use.
- 5. Position the low voltage wire and wire connector so that it is located within 6 inches (15.2 cm) from a building structure, a luminaire or fitting.
- 6. The main low voltage cable is intended for shallow burial less than 6 inches (152 mm).
- 7. If additional lengths of low voltage cable are required, please contact www.amplighting.com or call 1-813-978-3900.



Important Safety Instructions

INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS <u>Lighted lamp is HOT!</u>

WARNING - To reduce the risk of FIRE OR INJURY TO PERSONS.

- 1. Turn off/unplug and allow to cool before replacing lamp.
- 2. Lamp gets HOT quickly! Contact only switch/plug when turning on.
- 3. Do not touch the hot lens, guard or enclosure.
- 4. Keep lamp away from materials that may burn.
- 5. Do not touch lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
- 6. Do not operate the luminaire fitting with a missing or damaged shield.

 SAVE THESE INSTRUCTIONS

Package Contents

A. (1) Fixture Body


Optional Parts (sold separately)

A. (1) Stake

C. (4) Self-tapping Screws

B. (1) Extension Riser

Product Dimensions

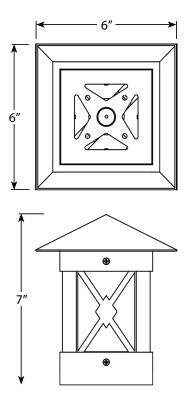


This fixture can be mounted to **4x4 wooden post** or **stake**. Please refer to the respective installation instruction steps per below.



AMP® PillarPro LED Post-Top Light APL-3019-4-B-BZ

OPTION A: MOUNT TO STAKE


1 Install Extension Riser on Fixture



Using a screwdriver, remove the bottom 4 screws from the fixture body. Pull the lead wire into the center of the fixture through the side wire exit and then place it through the center hole going back out. Attach the bottom back onto the fixture body and secure with the previously removed screws.

Thread a coupler and lock nut to the bottom of the fixture body. Then attach the extension riser, running the wire through all pieces.

2 Install Stake




Determine the desired location for mounting the fixture. Hammer the stake into the ground until flange of stake is flush to grade. To avoid damage to the stake, place a board on top of the stake while hammering.

NOTE: If the ground is hard and the stake is difficult to install, make a crosscut in the ground using a flat shovel.




AMP® PillarPro LED Post-Top Light APL-3019-4-B-BZ

3 Install Fixture Body to Stake



Clear away an area in the ground at the wireway slot on top of the stake. Lay the luminaire pigtail into the wireway slot. Then, thread the bottom end of the extension riser with the fixture body onto the stake. Tighten to secure the base.

4 Install Fixture Body to Stake

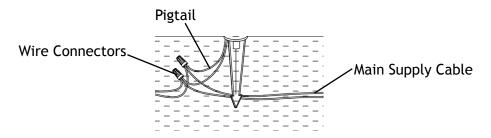


Strip both leads from the luminaire pigtail. Using two wire connectors (sold separately), connect the leads from the luminaire to the main supply cable leads.



AMP® PillarPro LED Post-Top Light APL-3019-4-B-BZ


OPTION B: MOUNT TO A 4X4 Post

1 Remove Top from Base




Using a screwdriver, unscew the screws on the side of the base and remove the top from the base.

2 Install Base to 4x4




Attach the base onto a 4" x 4" square wood post and secure with the self-tapping screws. Hand tighten with a screwdriver.

Install Top to Base



Attach the top back onto the base and secure with the screws previously removed. Hand tighten with a screwdriver.

Wire Connection



Main Supply Cable

Strip both leads from the luminaire pigtail. Using two wire connectors (sold separaetly), connect the leads from the luminaire to the main supply cable leads.



Help Hotline:

1-813-978-3900 • Mon-Fri 9am-6pm (EST)

Specifications and product details subject to change without notice. © Copyright 2019, AMP® Lighting, Lutz FL USA 33549 • All rights reserved. customersupport@amplighting.com • 813.978.3900