

INSTALLATION INSTRUCTIONS

AMP® LOW VOLTAGE LANDSCAPE LIGHTING

AMP® iQ Smart Deck Light

ITEM: SM-ADL-6007

1-813-978-3900 • Mon-Fri 9am-6pm (ET)

IMPORTANT: PLEASE READ BEFORE INSTALLATION

This luminaire is intended for installation in accordance with local codes and the National Electric Code (NEC). Failure to adhere to these codes and instructions may result in serious injury, property damage and void the warranty.

These instructions do not intend to cover all variations in installation, operation maintenance or mounting situations.

1. Make sure that the power is turned OFF before installing or servicing this luminaire.
2. **WARNING:** risk of electrical shock. Install all luminaires 10 feet (3.05M) or more from pool, spa or fountain.
3. This luminaire is intended to be used only with a power supply (transformer) rated maximum of 300 watts (25 AMPS) at 15 volts.
4. Wiring connections must be made with UL listed wire connectors that are suitable for outdoor use.
5. Position the low voltage wire and wire connector so that it is located within 6 inches (15.2 cm) from a building structure, a luminaire or fitting.
6. The main low voltage cable is intended for shallow burial - less than 6 inches (152 mm).

IMPORTANT SAFETY INSTRUCTIONS

INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS **LIGHTED LED MODULE IS HOT!**

WARNING - TO REDUCE THE RISK OF FIRE OR INJURY TO PERSONS.

1. Turn off/unplug and allow to cool before reducing lamp.
2. Fixture gets HOT quickly!
3. Do not touch the hot lens, guard or cowl.
4. Keep lamp away from materials that may burn.
5. Do not operate the fixture with a damaged or missing lens or shield.

SAVE THESE INSTRUCTIONS



INSTALLATION INSTRUCTIONS

AMP® iQ Smart Deck Light
SM-ADL-6007

WARNING

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- Make sure that the power is turned OFF before installing or servicing this luminaire.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Statement:

This equipment complies with FCC/ISED RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

PACKAGE CONTENTS


- A. (1) Deck Light
- B. (2) Lock Screws
- C. (2) Wall Anchors

PARTS REQUIRED (SOLD SEPARATELY)

- A. AMP iQ Smart Transformer

*** Visit our website www.amplighting.com to purchase. ***

PRODUCT DIMENSIONS

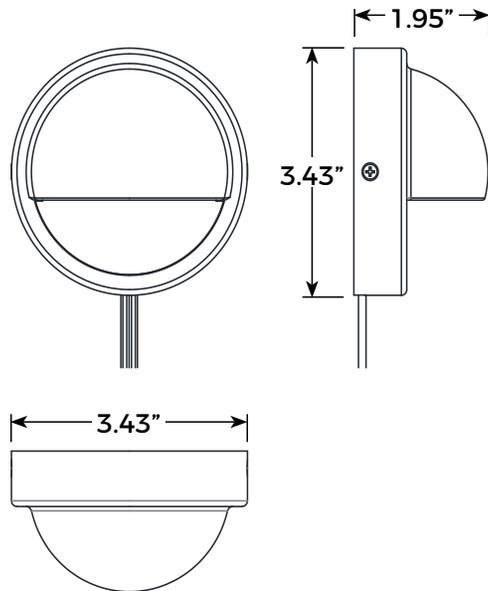


PRO TECHNIQUE FOR HIDING LEAD WIRE

Determine the location for the fixture. Drill a hole straight through the desired mounting location and run the lead wire out the backside of the location so that the wires are not visible from the front side. Use a matching trim piece and cut a groove in the back of trim. Cover the lead wires with the matching trim piece.

PRO TECHNIQUE FOR HIDING SPLICE CONNECTIONS


All fixtures come with 4' of lead wire or 25' lead wire enabling you to hide the splice connections out of sight. If you must make a splice connection in view, use an inline heat shrink style connection that is less visible than traditional twist caps.

1 REMOVE LENS ASSEMBLY

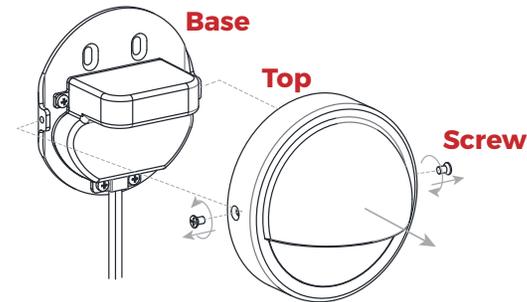

Loosen the screws to remove the top of the deck light. .


2 INSTALL BASE

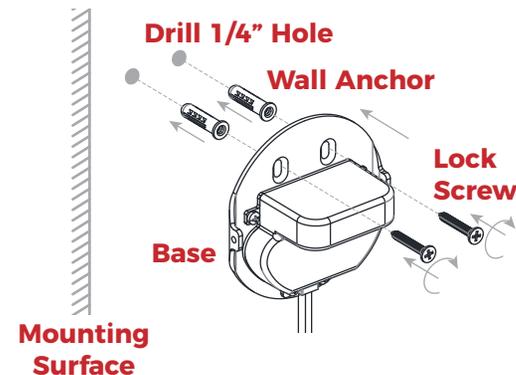

Attach the base onto the desired location and secure with the lock screws.


Note: Wall anchors are required for certain installation conditions (e.g. Brick wall, Concrete Wall, etc.). Mark on the mounting surface for wall anchors from the holes on the base. Remove the base and drill 1/4 inches holes on the mounting surface and then insert the wall anchors.

3 INSTALL Top

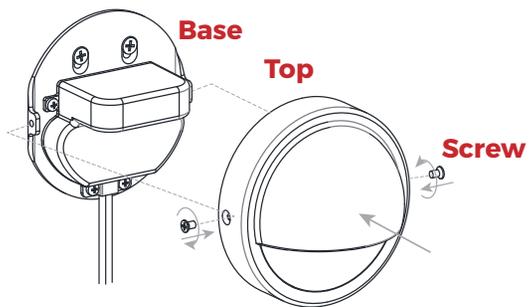

Place the top back onto the base and secure with previously removed screws.

4 WIRING

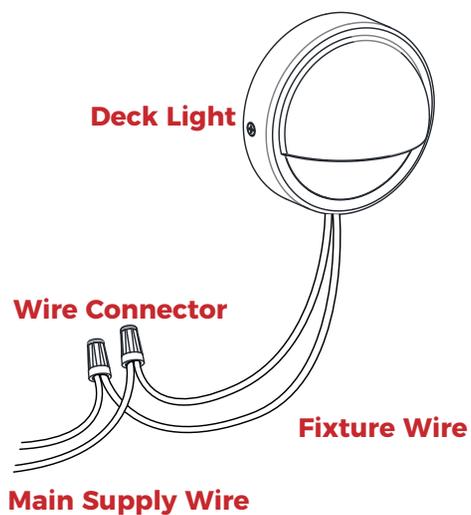


Strip both ends from the fixture wires. Using two UL listed wire connectors (sold separately), connect the fixture wires to the main supply wires.



INSTALLATION INSTRUCTIONS

AMP® iQ Smart Deck Light
SM-ADL-6007

TO COMPLETE SETUP
SCAN THE QR CODE

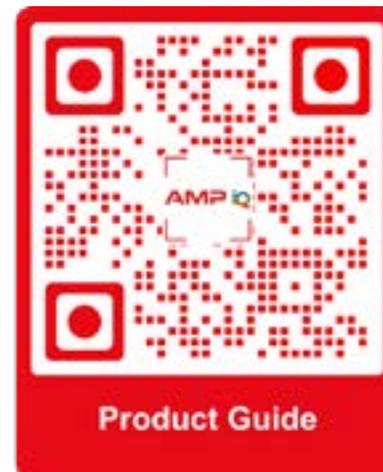



1-813-978-3700 • Mon-Fri 9am-6pm (ET)

Specifications and product details subject to change without notice.
© Copyright 2025, AMP® Lighting, Lutz FL USA 33549 • All rights reserved.
customersupport@amplighting.com • amplighting.com