



AMP® Low Voltage Landscape Lighting

Edge Light- AEL-25-27-BK; AEL-50-27-BK

PRODUCT DESCRIPTION

The AMP® Edge Light introduces a new and efficient way to illuminate landscape borders, garden beds, walkways, and patios with smooth, continuous linear light. This unique design combines flexible landscape edging with a durable integrated LED light, allowing contractors to easily create clean border illumination and highlight shrubs, trees, and landscape features.

Designed with installation flexibility in mind, Edge Light is available in 25- and 50-foot lengths and connects easily to AMP® low-voltage transformers using the included voltage converter. The light strip is cuttable every 2 inches, and each end includes connectors so remaining sections can be reused—ensuring no material goes to waste.

The additional length can be reused on another section of the project—helping reduce material waste and improve installation efficiency.



SPECIFICATIONS

- ▶ **Edge Light Length:** 25ft or 50ft
- ▶ **IP Rating:** IP67
- ▶ **CCT:** 2700K
- ▶ **Cuttable Lengths:** 2" increments, clearly marked on the reverse side. There are connectors at each end of the edge light. After being cut you can purchase a separate converter (VEL-CNVR-75) to power the remaining length.
- ▶ **Lumens:** 1253lm per 25' & 2506lm per 50'
- ▶ **Operating Voltage:** 12VAC-15VAC
- ▶ **LED Angle:** 120 degrees
- ▶ **Watts:** 25ft w/ converter- 44W; 50ft w/ converter 75W
- ▶ **Powered by:** AMP's Low Voltage Transformer

FEATURES & BENEFITS

- ▶ **True Continuous Linear Output** – Eliminates spotting and scalloping from individual fixtures, delivering a clean, uniform line of light.
- ▶ **Landscape Edging + Lighting in One System** – Combines structural garden edging with integrated illumination, reducing materials, trenching, and overall installation time.
- ▶ **Contours to Curves** – Flexible design conforms to curves, radiuses, and irregular bed lines without complex layout or fixture spacing calculations.
- ▶ **Transformer-Ready Integration** – Includes 12V-to-24V converter for direct connection to standard AMP Lighting low-voltage transformers.
- ▶ **Jobsite-Tough Construction** – IP68-rated (Direct burial certified by UL) converter and IP67-rated Edge Light built to withstand irrigation zones, soil contact, and long-term outdoor exposure.
- ▶ **Design Versatility** – Ideal for bed outlines, hardscape transitions, fence and wall silhouettes, and pathway edge definition.
- ▶ **Field cuttable every 2",** lead wire and connector attached to each end of the 25' or 50' run to reuse each piece after cutting

CERTIFICATIONS



File #E466348



File #E466348

WARRANTY

1 Year Warranty

PRODUCT SPECIFICATIONS




Project Name _____ Date _____

Type or Model _____ Qty _____

AMP® Low Voltage Landscape Lighting

Edge Light- AEL-XX-27-BK


PRODUCT DIMENSIONS

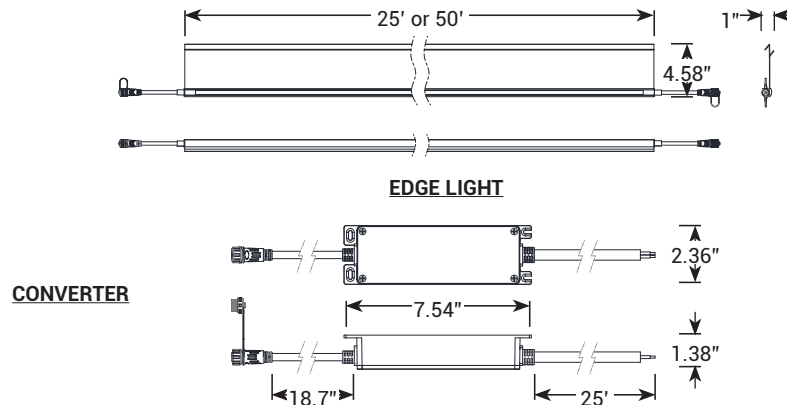

CORRECT BENDING METHODS

Lay the landscape edge light along the side of the designated pathway.

Refer to the following illustrations for the correct bending methods when laying the edge light.

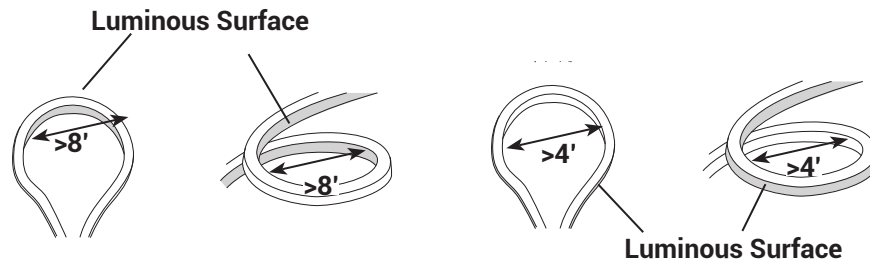

CONVERTER SPECIFICATIONS- VEL-CNVR-100

The Converter is shipped with each edge light.

May be purchased separately to utilize the remaining edge light after cutting.

- **IP Rating:** IP68 , rated for direct burial
- **Conversion:** 12V to 24V
- **Watts:** 25ft w/ converter- 44W; 50ft w/ converter 75W

