

Type or Model ___ _Qty_

AMP® Low Voltage Landscape Lighting

Project Name_

Customizable Cast Brass Up/Down Sconce - AHS-7003

PRODUCT DESCRIPTION

Constructed from solid brass with a bronze finish, this fixture is built for long-lasting performance and can withstand harsh outdoor conditions thanks to its completely watertight design.

The 2" mounting bracket allows for versatile installation on various surfaces, including lanai cage posts. Use up to two (2) LED MR16 bulbs to provide simultaneous upand down-lighting, creating a functional and inviting atmosphere.

With 16 customizable configurations, this sconce offers a variety of lighting options and aesthetic choices to fit your specific design needs. Customize your fixture with the following options:

- **Unidirectional Top**: Original top, brass with bronze finish
- **Lanai Tube Top**: Heavy frosted plastic lens, brass with bronze finish
- **▶ Glow Tube Top**: Heavy frosted plastic lens, brass with bronze finish

Optional Lens 2


Non-Emitting Cap: Brass with bronze finish




PRODUCT DIMENSIONS

Optional Lens 1

7.68



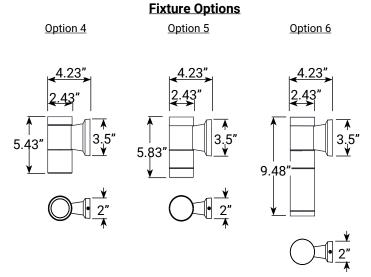

PRODUCT DIMENSIONS

PRODUCT SPECIFICATIONS



Project Name	Date
•	
Type or Model	Qty

FEATURES & BENEFITS

- ▶ Sheet Brass Construction.
- Customizable top and bottom pieces allow 16 different unique combinations to fit your design needs
- ▶ 25' 18-gauge lead wire
- ▶ Uses up to (2) MR16 bulbs (sold separately)
- 2" mounting bracket allows for more mounting solutions, including lanai cage posts
- Beryllium copper sockets offer more corrosion-resistance than regular copper
- Sockets are pre-greased with dielectric grease
- ▶ Silicone plug where lead wires exit fixture prevents moisture and insects from entering fixture
- ▶ Lens is flush with fixture so water cannot puddle
- Completely watertight, with a rubber pressure gasket and rubber seal around wire exit
- ▶ Heat-shrink tubing over internal splice
- UL braided sleeve protector

SPECIFICATIONS

· Construction: Brass

· Finish: Bronze

Lead Wire: 25ft, 18 AWGLight Source: MR16

Operating Voltage: 12VAC

Powered by: AMPs Low Voltage Transformer

WARRANTY

Lifetime Warranty

CERTIFICATIONS



