



Project Name \_\_\_\_\_ Date \_\_\_\_\_

Type or Model \_\_\_\_\_ Qty \_\_\_\_\_

# AMP iQ™ Smart RGBCW LED Well Light

SM-AWL-713-B-BZ (Bronze)  
SM-AAL-713-B-BK (Black)

## PRODUCT DESCRIPTION

Built for professional-grade performance, the AMP® iQ™ Smart Well Light combines durable construction, flexible optical performance, and advanced smart lighting control in a single, fully integrated fixture. Constructed from cast brass materials with AMP Lighting quality, its modular design helps improve long-term serviceability and maintenance costs.

Integrated into the AMP iQ™ smart lighting platform, this fixture connects through a Bluetooth® mesh network and is controlled with the easy-to-use, intuitive AMP iQ™ mobile app, enabling system-wide organization and control through zones, groups, scenes, and automations. Allowing precise control of brightness, colors and tunable white temperatures. AMP iQ™ is the only Lifetime Warranty Smart Platform in the landscape industry.

## KEY BENEFITS

- AMP iQ™ Smart system device.
- Control with the AMP iQ™ Smart Landscape Lighting app.
- Extended CCT options including 2200K, 2500K, 2700K, 3000K, 3500K and 4000K. Full spectrum RGBCW capabilities.
- Interchangeable Smart LED module allows for easy serviceability
- Dimming from 0% to 100% via the AMP iQ™ app.
- Customize colors, color temperature, dimming, and scheduling with the AMP iQ™ app.
- Interchangeable optics - 2 beam angles; 60° and 38°.
- Water Tight Silicone O-Ring - keeps water from entering luminaire.
- Cold forged brass faceplate for maximum durability
- Fully submersible well light
- Raised lens to prevent water from puddling.
- Water tight wire gland
- Three additional faceplates to choose from, beacon, shielded and grated (sold separately).
- Fully-submersible - enhanced wire gland and a fully potted wire entrance for maximum protection against moisture and water intrusion.



## SPECIFICATIONS

- **Construction:** Cold Forged Brass faceplate
- **Finish:** Bronze or Black
  - Bronze finish will patina naturally over time
  - Black finish is a marine grade polyester powdercoat paint. Finish is rated per ASTM B117 for a minimum 3000-hour salt spray test.
- **Lead Wire:** 25' 14AWG
- **Lens:** Clear flat glass lens
- **Light Source:** Integrated AMP iQ™ Smart LED module
- **Volt Amps:** 20VA
- **Operating Voltage:** 11V-16VAC
- **Powered by:** AMP iQ™ Smart LED Transformer
- **Power Consumption:** 16W
- **IP Rating:** IP68
- **Lumens:** 854 to 981 lumens based on CCT, see chart Up to 93 CRI (see chart)"
- Maximum distance between well lights for robust connectivity is ≤ 10ft.

## WARRANTY

Lifetime Warranty

## CERTIFICATIONS





## AMP IQ™ Smart RGBCW LED Well Light


SM-AWL-713-B-BZ (Bronze)

SM-AAL-713-B-BK (Black)

### PHOTOMETRICS & ELECTRICAL

Fixture	CCT/RGB	Lumens	CRI	Wattage	PF	VA
SM-AWL-713 AMP IQ™ Well Light	2200K	854	87	16.0	0.77	20.0
	2500K	823	90			
	2700K	816	92			
	3000K	981	93			
	3500K	941	92			
	4000K	930	92			
	Red	276	NA			
	Green	616	NA			
	Blue	125	NA			

### PRODUCT DIMENSIONS

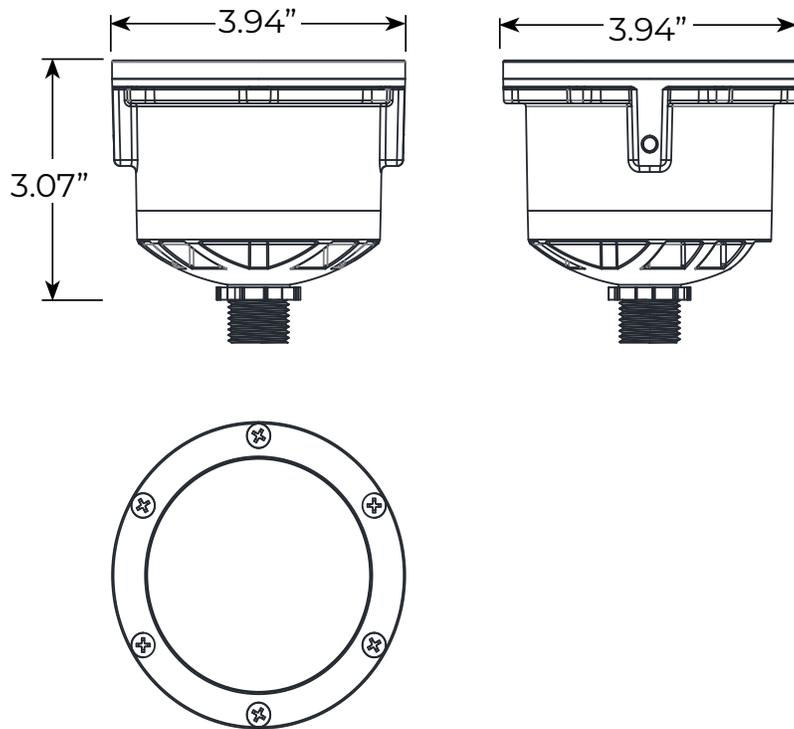



## AMP iQ™ Smart RGBCW LED Well Light

SM-AWL-713-B-BZ (Bronze)  
SM-AAL-713-B-BK (Black)

### TECHNICAL SPECIFICATIONS

The AMP iQ™ Lighting System is a complete, ecosystem-based solution where every component works together within a secure Bluetooth® mesh network. AMP iQ™ lighting fixtures, gateways, and transformers are engineered to communicate seamlessly, enabling advanced control, effects, and automation across an entire property. To ensure optimal performance and reliability, all system installations must use AMP iQ™ approved devices and the AMP iQ™ app.



- **Connectivity:** Bluetooth® 5.0 mesh network
- **Wireless Range:** Up to 100 ft fixture-to-fixture (line of sight), depending on fixture type
- **Network Type:** Self-healing mesh for reliable system communication
- **Wi-Fi Requirement:** 2.4 or 5.0 GHz Wi-Fi required for gateway connectivity
- **Control:** AMP iQ™ App (iOS® & Android®)
- **Cloud Access:** Secure, U.S.-based cloud infrastructure for remote control & automations
- Requires an AMP iQ™ Gateway attached to a Wi-Fi network for remote access and scheduling
- **System Compatibility:** Requires AMP iQ™-compatible fixtures, devices and the AMP iQ™ app.
- Proper voltage levels at 11V to 16V for each device is required to maintain a robust system and reliable operation.



**SMART GATEWAY**  
-<20FT TO WI-FI ROUTER



**BLUETOOTH SIGNAL**  
GATEWAY TO TRANSFORMER  
-<75FT DISTANCE REQUIRED



**BLUETOOTH SIGNAL**  
DEVICE TO DEVICE  
UP TO 100FT DISTANCE