


AMP®

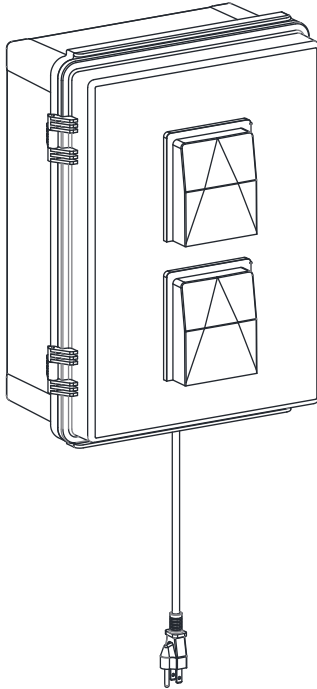

INSTALLATION & MAINTENANCE GUIDE

AMP® Weatherproof Amplifier Enclosure

ITEM: VAU-VAC-WPEN

SAVE THESE INSTRUCTIONS

! IMPORTANT SAFETY INSTRUCTIONS

This weatherproof amplifier enclosure is intended for installation in accordance with local codes and the National Electric Code (NEC). Failure to adhere to these codes and instructions may result in serious injury, property damage and void the warranty.


These instructions do not intend to cover all variations in installation, operation maintenance or mounting situations.

1. **WARNING:** To prevent fire or shock hazard, do NOT install this weatherproof amplifier enclosure near water, expose this weatherproof amplifier enclosure to rain or moisture.
2. Clean only with dry cloth.
3. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
4. Do not install near heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
5. Do not defeat the safety purpose of the polarized or grounding type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
6. Protect the power cord from being walked on or pinched especially at the plugs.
7. Unplug the amplifier during lightning storms or when unused for long periods of time.
8. Refer all servicing to qualified personnel.


PACKAGE CONTENTS

- | | |
|---|--------------------------|
| A. (1) Weatherproof Amplifier Enclosure | C. (4) Wall Anchor |
| B. (4) Screw | D. (4) Waterproof Washer |
| | E. (1) Allen Wrench |


PRODUCT DIMENSIONS

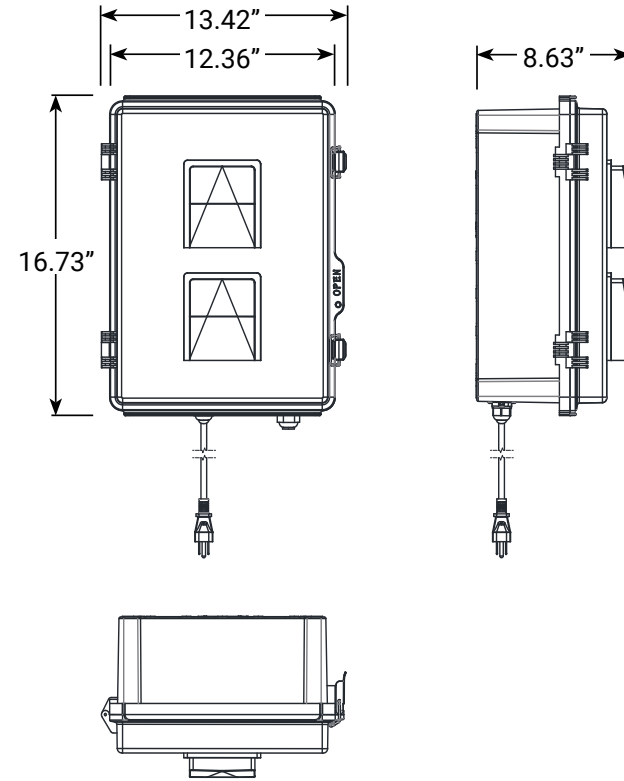

1 OPEN THE DOOR

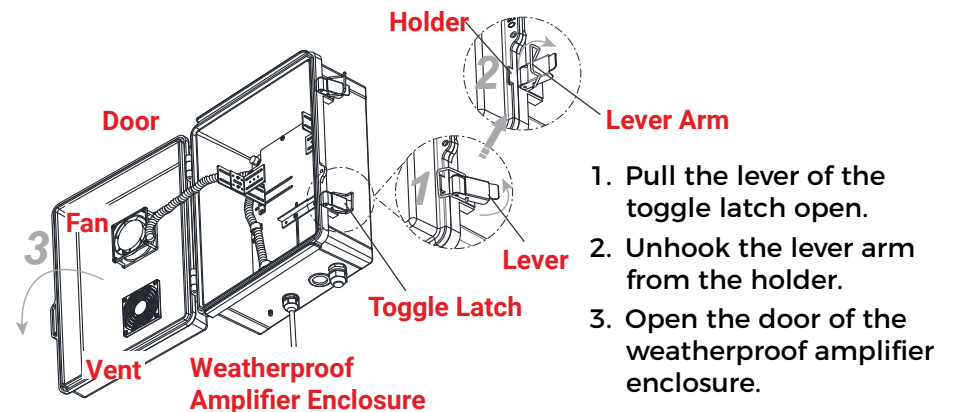


2 INSTALL WEATHERPROOF AMPLIFIER ENCLOSURE

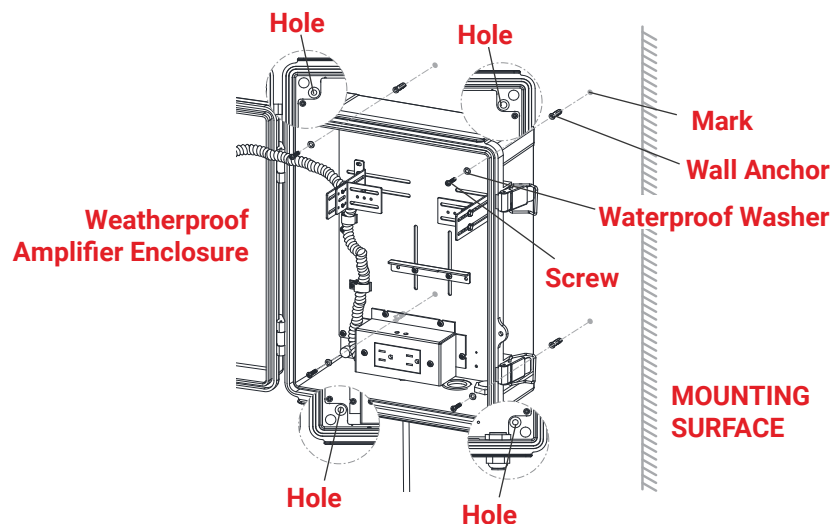

1. Place one waterproof washer on each screw.
2. Attach the weatherproof amplifier enclosure to the desired mounting surface and secure with screws. Hand tighten with a screw driver.

Note: Wall anchors are required for certain mounting surface, such as: concrete, brick, etc. Mark the wall anchors locations through the holes at four corners. Drill 3/8" holes from the marks and insert the wall anchors into the drilled holes completely.


3 ADJUST THE BOTTOM SUPPORT TAB POSITION

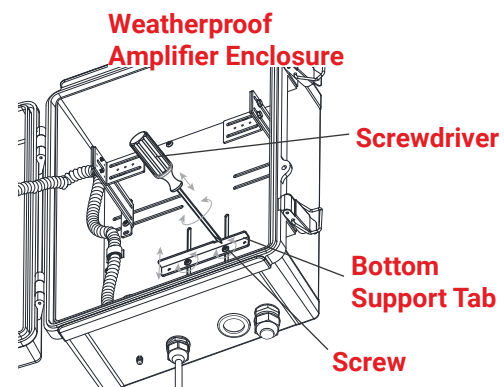

Screwdriver is required for this step.


1. Slightly loosen the screws on the bottom of the support tab.
2. Slide the bottom support tab up or down until it moves to the proper position.
3. Tighten the screw after adjustment.

4 ADJUST THE SIDE SUPPORT TABS POSITION

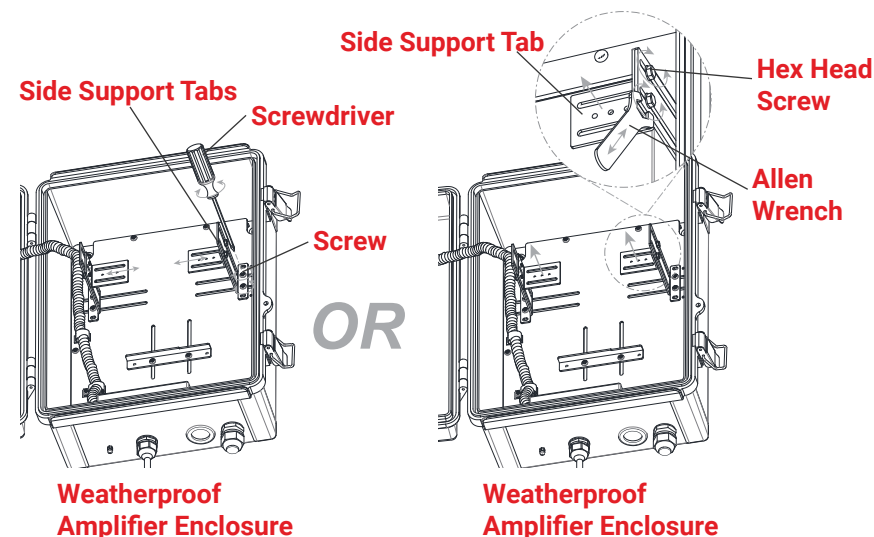

1. Using a screw driver, slightly loosen the screws on the side support tab. Slide the side support tabs left or right until it moves to the proper position. Tighten the screws after adjustment. Or
2. Using the Allen wrench, loosen the hex head screws. Slide the side support tabs to the highest position. Tighten the hex head screws after adjustment.


5 PLACE THE AMPLIFIER

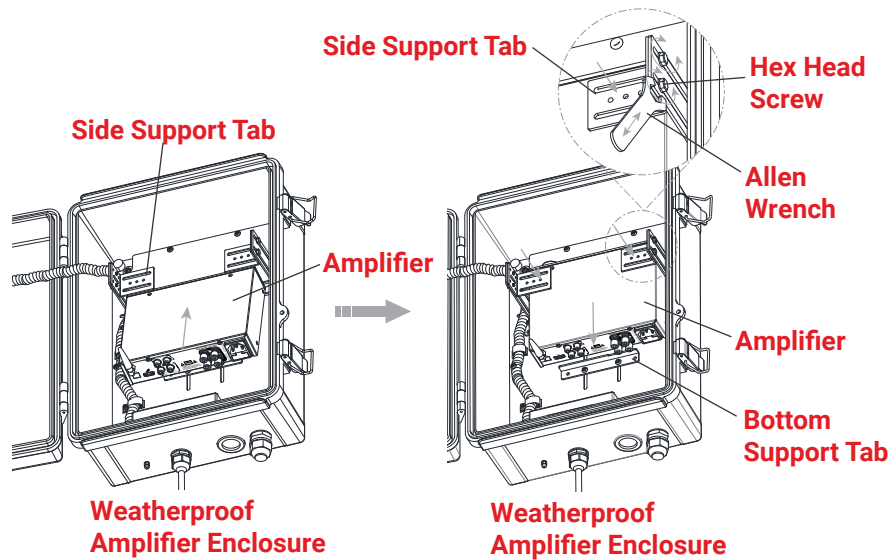

Allen wrench is required for this step.


1. Insert the amplifier under the side support tabs.
2. Sit the amplifier on the bottom support tab.
3. Using the Allen wrench, loosen the hex head screws. Slide the side support tabs until they move to the amplifier. Tighten the hex head screws to secure the amplifier to the weatherproof amplifier enclosure.

6 CONNECT THE CABLE TO AMPLIFIER

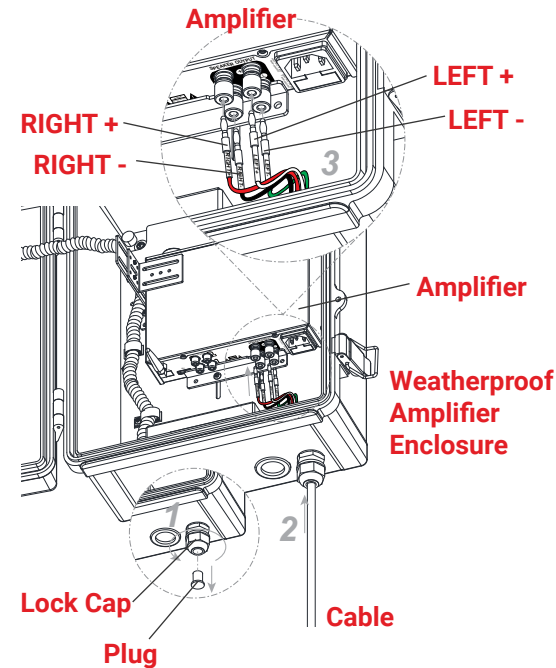


1. Loosen the lock cap to remove the plug.
2. Pass the cable through the lock cap and insert the ends into the weatherproof amplifier enclosure.
3. Connect the cable to the amplifier. The ends are color-coded to match that of the amplifier.
NOTE: You'll have "Right" speaker as "Red + & Black -" / "Left" speaker as "White + & Green -".

6 FASTEN THE CABLE

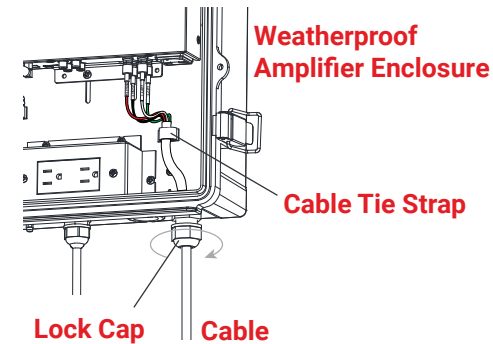


1. Organize the cable and fasten it with the cable tie strap.
2. Tighten the lock cap.

8 CONNECT AMPLIFIER POWER CORD

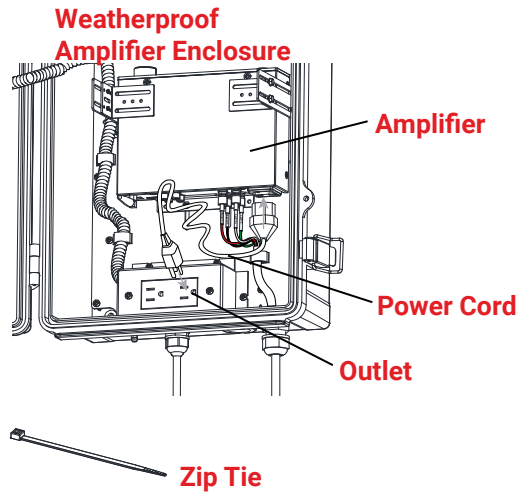


Connect the amplifier to the outlet by using the power cable. If necessary, use the zip tie to organize the power cord and tuck the slack cord in the weatherproof amplifier enclosure.


9 CLOSE THE DOOR

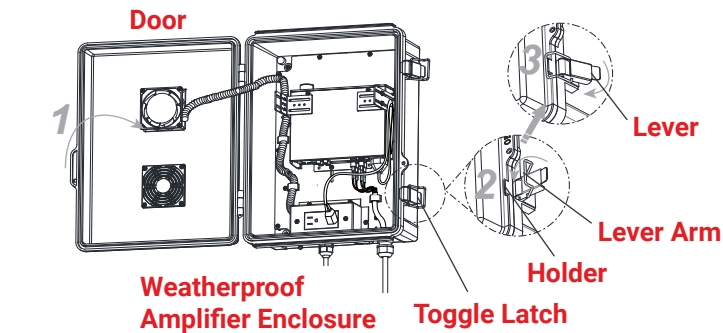

1. Close the door of the weatherproof amplifier enclosure.
2. Hook the lever arm to the holder.
3. Push the lever of the toggle latch down.
4. If necessary, padlock can be installed.

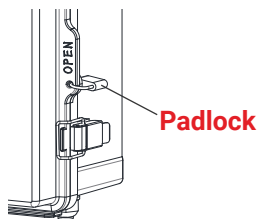


10 CONNECT THE GROUND WIRE

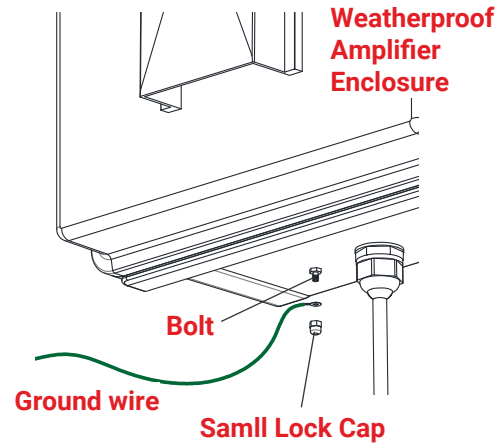

Loosen the small lock cap on the bottom of the weatherproof amplifier enclosure. Place the end of the ground wire to the bolt. Thread the small lock cap back to secure the ground wire.

11 CONNECT THE WEATHERPROOF AMPLIFIER ENCLOSURE

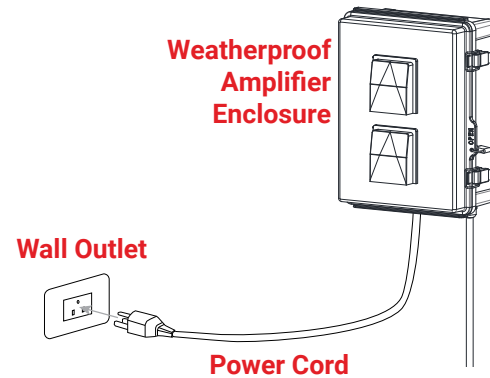

Connect the power cord from the weatherproof amplifier enclosure to the wall outlet.



INSTALLATION & MAINTENANCE GUIDE

AMP Weatherproof Amplifier Enclosuer
VAU-VAC-WPEN



INSTALLATION & MAINTENANCE GUIDE

AMP Weatherproof Amplifier Enclosure

VAU-VAC-WPEN



1-813-978-3700 • Mon-Fri 9am-6pm (ET)

Specifications and product details subject to change without notice.

© Copyright 2024, AMP® Lighting, Lutz FL USA 33549 • All rights reserved.

customersupport@amplighting.com • amplighting.com