

## INSTALLATION & MAINTENANCE GUIDE

**AMP**<sup>®</sup> Lighting

AMP<sup>®</sup> Low Voltage Landscape Lighting

AMP<sup>®</sup> 6" DescentPro Hardscape Light

AHS-7004-4-B-BZ

Help Hotline:

1-813-978-3900 • Mon-Fri 9am-6pm (EST)

[www.amplighting.com](http://www.amplighting.com)

# AMP® AMP® DescentPro Hardscape Light AHS-7004-4-B-BZ

## ⚠ Important Safety Instructions: Read Before Installation

This luminaire is intended for installation in accordance with local codes and the National Electric Code (NEC). Failure to adhere to these codes and instructions may result in serious injury, property damage and void the warranty.

These instructions do not intend to cover all variations in installation, operation maintenance or mounting situations.

1. Make sure the power is turned OFF before installing or servicing this luminaire.
2. **WARNING:** risk of electrical shock. Install all luminaires 10 feet (3.05M) or more from pool, spa or fountain.
3. This luminaire is intended to be used only with a power supply (transformer) rated maximum of 300 watts (25 AMPS) at 15 volts.
4. Wiring connections must be made with UL listed wire connectors that are suitable for outdoor use.
5. Position the low voltage wire and wire connector so that it is located within 6 inches (15.2 cm) from a building structure, a luminaire or fitting.
6. The main low voltage cable is intended for shallow burial - less than 6 inches (152 mm).
7. If additional lengths of low voltage cable are required, please contact [www.amplighting.com](http://www.amplighting.com) or call 1-813-978-3900.

## ⚠ Important Safety Instructions

**INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS**  
**Lighted lamp is HOT!**

**WARNING** - To reduce the risk of FIRE OR INJURY TO PERSONS.


1. Turn off/unplug and allow to cool before replacing lamp.
2. Lamp gets HOT quickly! Contact only switch/plug when turning on.
3. Do not touch the hot lens, guard or enclosure.
4. Keep lamp away from materials that may burn.
5. Do not touch lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
6. Do not operate the luminaire fitting with a missing or damaged shield.

SAVE THESE INSTRUCTIONS


## Package Contents

- A. (1) Luminaire
- B. (4) Lock Screws

## Product Dimensions

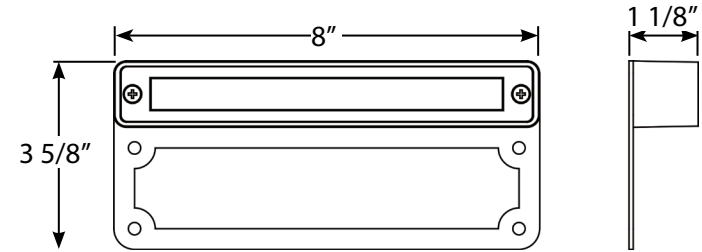


## 1 Remove Lens

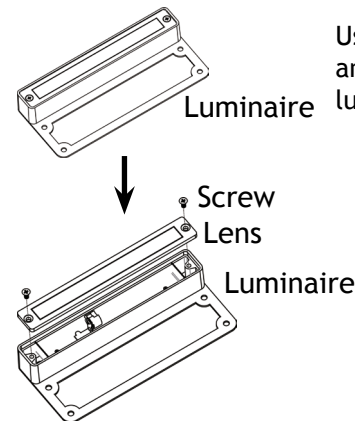

Using a screwdriver, loosen the screws and remove them from the lens of the luminaire.

## 2 Install Bulb




Insert the bulb with the correct wattage and type marked on luminaire label.

**CAUTION:** Do not exceed maximum wattage marked on luminaire label.

**NOTE:** DO NOT touch bulb with bare hands. Use soft cloth to handle bulb.


**AMP**<sup>®</sup> AMP<sup>®</sup> DescentPro Hardscape Light  
AHS-7004-4-B-BZ

**3** Install Lens

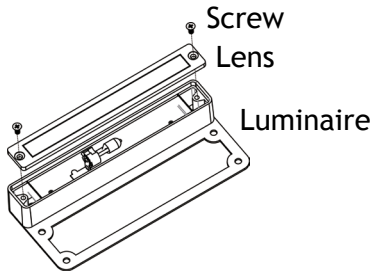

Place the lens back onto the luminaire and secure with the removed screws on Step 1.


**4** Install Luminaire

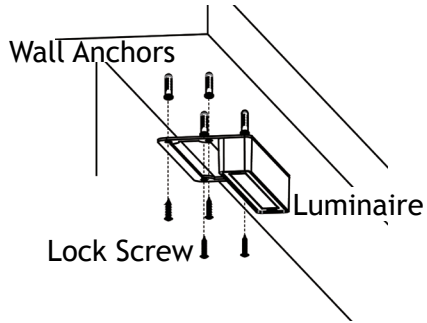

Attach the luminaire onto your desired location and secure with the lock screws.

Note: Wall anchors are required for certain installation conditions (brick wall, concrete wall, etc.). Place a mark on the wall for the wall anchors using the holes on the base. Remove the base and drill proper holes on the wall and then insert the wall anchors.

**3** Wire Connections

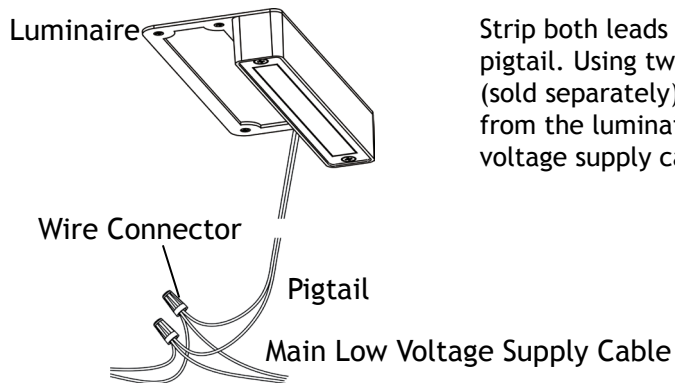

Strip both leads from the luminaire pigtail. Using two wire connectors (sold separately), connect the leads from the luminaire to the main low voltage supply cable leads.

**AMP**<sup>®</sup> AMP<sup>®</sup> DescentPro Hardscape Light  
AHS-7004-4-B-BZ

**Install/Replace Bulb**

Loosen the screws on the lens, remove the lens to expose the bulb and replace it with correct wattage and type marked on the fixture label. Then reinstall the lens to the fixture.

**IMPORTANT:** Bulbs must be protected from moisture and dust at all times. Always reinstall the lens when removed.



**AMP**<sup>®</sup> Lighting

**Help Hotline:**

**1-813-978-3900 • Mon-Fri 9am-6pm (EST)**

Specifications and product details subject to change without notice.  
© Copyright 2019, AMP<sup>®</sup> Lighting, Lutz FL USA 33549 • All rights reserved.  
customersupport@amplighting.com • 813.978.3900

**[www.amplighting.com](http://www.amplighting.com)**

IS-AHS-7004-B-BZ-ver1.pdf