



AMP® Low Voltage Landscape Lighting


MR11 LED Color Lamp- MR11-35-RGBCW1

PRODUCT DESCRIPTION

A reliable and easily interchangeable color-changing LED MR11 lamp. Featuring a wide range of colors, adjustable brightness, and choice in color temperature (from warm 2200K to bright 4000K), this lamp is perfect for any landscape lighting solution. Requires AMP® RGBCW RF Remote Control for use (sold separately). Designed to provide balanced, multi-colored lighting. Designed and optimized for compatibility with select MR11 fixtures.



PRODUCT DIMENSIONS

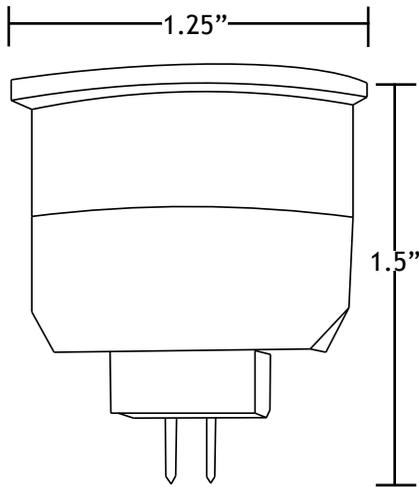

SPECIFICATIONS

- ▶ **Input Voltage:** 11-16V, 50/60Hz AC
- ▶ **Beam Angles:** 38° beam spread
- ▶ **Correlated Color Temperature (CCT):** 2200K, 2700K, 3000K, 4000K
- ▶ **Color Rendering Index (CRI):** > 80
- ▶ **Operating Voltage:** 12VAC
- ▶ **Powered by:** AMP's Low Voltage Transformer
- ▶ **Watts:** 3W
- ▶ **Lumens:** 270 at 2200K | 289 at 4000K | 301 at 3000K | 333 at 4000K

FEATURES & BENEFITS

- ▶ Replacements for 30W Halogen MR11 lamps
- ▶ 38° beam spread
- ▶ **Requires AMP® RF Remote Control (sold separately) for usage. One remote controls all AMP® RGBCW lamps.**
- ▶ Designed and optimized for compatibility with all current MR11 fixtures.
- ▶ RGB + Cool White to Warm White
- ▶ Dimmable

WARRANTY

Residential: Lifetime Warranty