




# AMP® Low Voltage Landscape Lighting Adjustable Beam Angle Multi Source LED MR16 Bulb- 3000K

## Product Description

Engineered to withstand the elements, AMP® LED bulbs are designed specifically for low-voltage landscape lighting and are backed by a Lifetime Guarantee. Our new, industry innovating design for the MR16 bulb allows for the manual adjustment of the beam spread. With this extremely handy design feature, professionals can quickly adjust light output as needed to acquire the ideal spread of illumination on a desired landscape or architecture feature. With three beam spreads offered in one bulb, this innovation eliminates the worry of wondering if you've specified the correct beam spreads for a particular project. The flexibility also allows for fine-tuning in the future if needed - possibly making adjustments as a tree or foliage continues to grow overtime. Adjusting the beam spread is simple as well - simply turn the lens to adjust as needed and align the indication arrow on the bulb with your desired setting.

## Product Dimensions

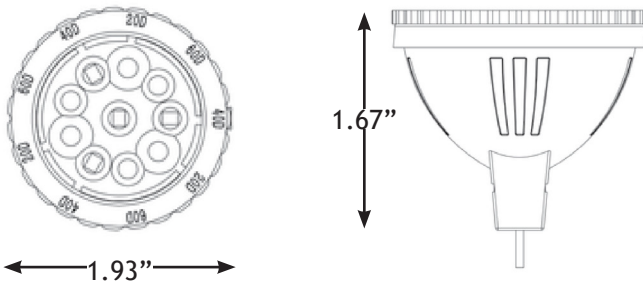

## Specifications

- Z Input Voltage, Frequency: 11-16V
- Z Lumen Output
  - 3W (20W equiv.) Models: 300 lm
  - 5W (30W equiv.) Models: 400 lm
- Z Correlated Color Temperature (CCT): 3000K
- Z Color Rendering Index (CRI): >80
- Z Life: 40,000 hours (L70)



## Features & Benefits

- Z Replacements for:
  - 20W or 30W Halogen MR16s
  - Manually Adjustable 20°, 40° & 60° Beam Angles
- Z Reduces energy consumption by about 75%
- Z Lasts up to 8 times longer than halogen lamps or 40,000 hours
- Z No warm-up time, instant-on with full light output and stable lamp to lamp color
- Z The various beam angels offered in one bulb allows for flexibility, making one bulb able to be used in various landscape lighting situations.

## Warranty

- Residential: Lifetime Warranty
- Commercial: 10-Year Warranty

## Certifications

