## Installation Instructions

### 3W 7" China Hat with Finial, 12V Outdoor Brass Path Light, Includes Stake & LED bulb

LPL-PLKIT

## WARNING

This fixture is intended for installation in accordance with local codes and the National Electric Code (NEC). Failure to adhere to these codes and instructions may result in serious injury, property damage and void the warranty.

These instructions do not intend to cover all variations in installation, operation maintenance or mounting situation.


- 1. Make sure that the power is turned OFF before installing or servicing this fixture.
- 2. This fixture is perfect for placing in water fountains, water falls, ponds, pools, etc.
- This fixture is intended to be used only with a power supply (transformer) rated maximum of 300 watts (25 AMPS) at 12 volts ~ 22 volts.
- 4. Underground Low Energy Cable must not be buried over 6" (15.2 cm) in order to connect to the main low voltage cable.
- 5. Wiring connections must be made with UL listed wire connectors that is suitable for outdoor use.
- 6. Position the wire connector so that it is located within 6 inches (15.2 cm) from a building structure, a luminaire, or fitting.

## LIT FIXTURE IS HOT!

#### WARNING - TO REDUCE THE RISK OF FIRE OR INJURY TO PERSONS.

- 1. Turn off/unplug and allow to cool before reducing lamp.
- 2. Lamp gets HOT quickly!
- 3. Do not touch the hot lens, guard or cowl.
- 4. Keep lamp away from materials that may burn.
- 5. Do not touch lamp at any time.
- 6. Use a soft cloth.
- 7. Oil from skin may damage lamp.
- 8. Do not operate the fixture with a damaged or missing lens or shield.

# Installation Instructions

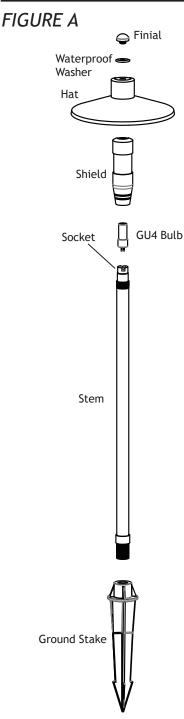

### REFER TO FIGURE A WITH INSTRUCTIONS 1-3:

STEP 1: Remove the finial, waterproof washer, hat and shield from the stem.

STEP 2: Insert the GU4 Bulb into the socket.

STEP 3: Install the shield, hat, waterproof washer and finial back onto the stem.

STEP 4: Make a wire connection with the run line by splitting the two ends of each wire. Then connect both left side ends of each wire and both right side ends. These do not have polarity, so just don't connect both ends of the same wire together. See Figure B for details.

STEP 5: Turn on the transformer to ensure fixture is functioning properly.

STEP 6: Enjoy your new outdoor lighting.

